

PRODUCT CATALOGUE



THE ART OF
MOVING FORWARD



INDEX

ABOUT US	4
TYRE READING INFORMATION	19
AGRICULTURAL TYRES	22 - 55
VF Radial Tractor Tyres	26
Radial Tractor Tyres	27 - 31
Radial Flotation Tyres	31- 33
Front Tractor Tyres	38 - 40
Rear Tractor Tyres	41 - 43
Irrigation Tyres	43 - 44
Harvester Tyres	44 - 45
Flotation Tyres	46 - 50
Implement Tyres	51 - 54
Forestry Tyres	54
INDUSTRIAL, EM, OTR TYRES	56 - 71
All Steel Radial Tyres	60 - 61
Radial EM Tyres	62
EM / Industrial Tyres	62 - 67
Compactor Tyres	68
Forklift Tyres	69
Solid Forklift Tyres	69
LCV TYRES	72 - 77
Light Truck & Minibus Tyres	76 - 77
CORRESPONDING TYRE SIZE	80





Built on Expertise Since 1991

Since 1991, we have been on a journey to achieve excellence in the global market and stand out with our expertise. Advancing with a vision to reach leadership and become a global brand, we are committed to making a difference.



The Art of Being a World Brand

With a network of over 400 authorized dealerships in Türkiye and reaching 90 countries across 6 continents worldwide, we are steadily growing to become a globally recognized brand with our high-quality products.



Comprehensive Product Portfolio

As Özka Tyres, we utilize advanced production systems to create a diverse range of products. Our radial agricultural tyre selection includes options for tractors, harvesters, and trailers, while the conventional agricultural tyre category features products for tractors, trailers, harvesters, and garden/field use. In the industrial tyre category, we offer options suitable for excavation, road construction machinery, and forklifts. In addition, our newly introduced VF radial tractor tyres, all-steel radial tyres, steel-belted radial EM and radial flotation tyres. Additionally, we manufacture tyres for light commercial vehicles, such as pick-up/minibus tyres. Our solutions, crafted with expertise, address the varied needs of the industry.



The Art of Innovation

Our R&D team develops products based on our expertise, ensuring the quality and safety of our products from raw material input to post-shipment control. We conduct our business with innovative solutions and certify our quality with ISO9001, ISO14001, ISO45001, and ISO27001 management system certificates.



Customer-Centric Approach

With a customer-centric approach, on-time delivery, and quick solutions, we offer robust, reliable, and compliant tyres that meet national and international standards. Managing all processes with expertise, we efficiently handle our order processes in a corporate infrastructure that works seamlessly through renewed CRM, B2B, and SAP systems. Our post-sales support and technical service teams provide swift solutions to inquiries, suggestions, and complaints.



The Art of Moving Forward

We consider our young, dynamic, and experienced team of 1500 employees as the foundation for sustainable growth. Actively participating in activities such as corporate training, seminars, and exhibitions for the development of human resources, we consistently strive for improvement goals.

THE ART OF BUILDING TRUST



OUR CERTIFICATES





THE ART OF MOVING FORWARD

We're not following the path everyone else takes. We draw our own path to achieve perfection and make a difference with our expertise.

Just like an artist meticulously crafts every detail, giving meaning to their work, we approach our tyres with an artistic perspective. And by combining this approach with our superior manufacturing technologies, we create design masterpieces.

This catalogue is an interpretation of ÖZKA's expertise through an artistic perspective.


THE ART OF BEING A WORLD BRAND

Discover Özka's expertise reaching 6 continents and 90 countries.



THE ART OF LEADERSHIP

Elevate your business with tailored solutions by partnering with Özka, a leading manufacturer of agricultural and industrial tyres.

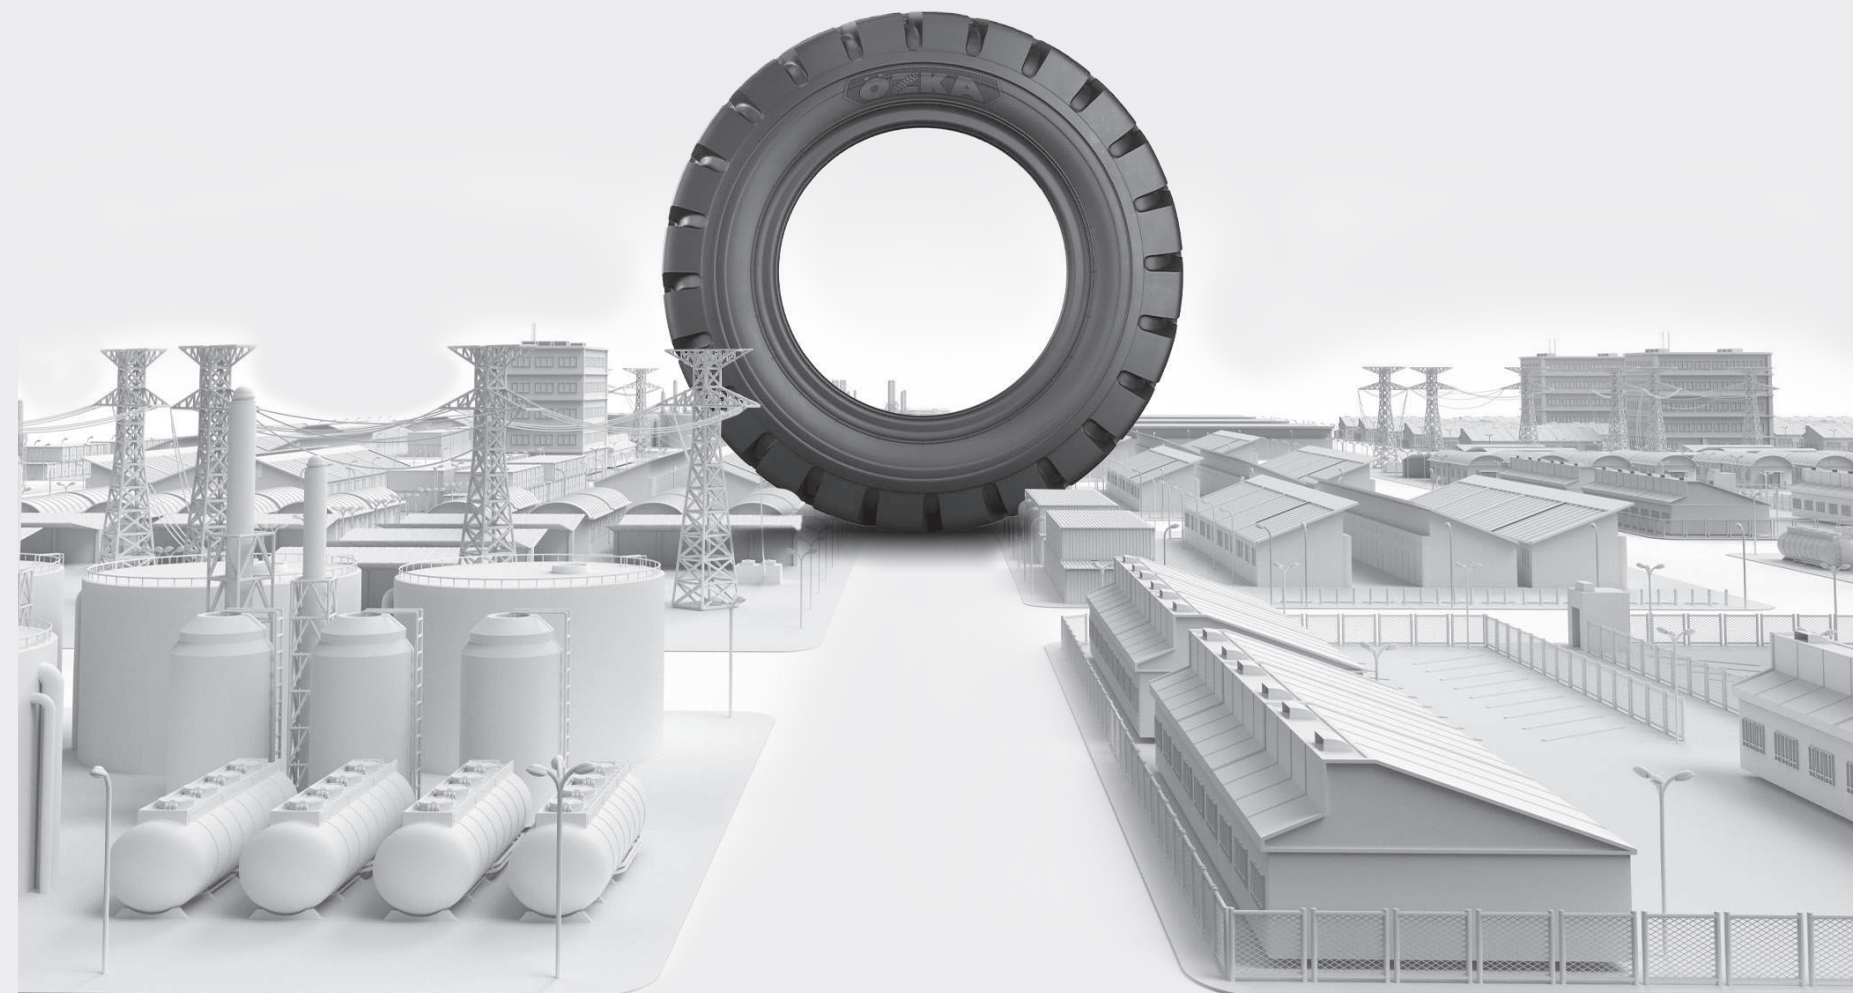

THE ART OF CREATING TRUST

Explore the assurance of reliability and excellence
through Özka's international certifications.



THE ART OF UNDERSTANDING REAL NEEDS

Explore Özka's wide range of products designed to fulfill diverse customer requirements.



THE ART OF HIGH PERFORMANCE

Choose from a range of radial and conventional tyres
that suit you best and meet Özka's superior performance and power.

ÖZKA





EXPERTISE IN ANY DETAILS



PRODUCT RANGE

RADIAL TRACTOR TYRES



RADIAL FLOTATION TYRES



IMPLEMENT TYRES



FORESTRY TYRES



FRONT TRACTOR TYRES



REAR TRACTOR TYRES



ALL STEEL RADIAL TYRES



RADIAL EM TYRES



IRRIGATION TYRES



HARVESTER TYRES



FLOTATION TYRES



EM / INDUSTRIAL TYRES



FLOTATION TYRES



COMPACTOR TYRES



FORKLIFT TYRES



SOLID FORKLIFT TYRES



LIGHT TRUCK & MINIBUS TYRES



AGRICULTURAL TYRES

FLEXTURE	AGROLOX	AGRO10	AGRO11
AGRIGOR20	STAGRI	STRIVEX	KNK30
KNK32	KNK33	KNK35	KNK50
KNK53	KNK57	KNK55	KNK36
KNK48	KNK22	KNK25	KNK26
KNK27	KNK28	KNK42	KNK46
KNK52	KNK56	KNK41	KNK54
KNK140	FRS40		







FLEXTURE

VF RADIAL
TRACTOR TYRES



- Significantly increased flexibility thanks to its advanced technology.
- Enhanced load-carrying capacity at lower pressure, preventing soil compaction.
- Greater convenience and comfort by removing the need to adjust tyre pressure between roads and fields that helps saving time.

70 SERIES	Product Code	Tyre Size	TT/ TL	Version	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	psi		
					804	2050			9750	29	5792	888
	*UR7038800402OZK	VF 800/70 R38	TL	Steel Belted								
75 SERIES	*UR7542710402OZK	VF 710/75 R42	TL	Steel Belted	704	2110	184	D	9000	29	5978	924
80 SERIES	*UR8050480402OZK	VF 480/80 R50 CFO	TL	Steel Belted	479	2025	179	D	7750	52	5929	923
90 SERIES	*UR9046380402OZK	VF 380/90 R46 CFO	TL	Steel Belted	387	1840	173	D	6500	64	5394	841
	*UR9050380402OZK	VF 380/90 R50 CFO	TL	Steel Belted	387	1940	175	D	6900	64	5710	891
	*UR9054380402OZK	VF 380/90 R54 CFO	TL	Steel Belted	387	2045	176	D	7100	64	6037	943



AGROLOX

RADIAL
TRACTOR TYRES

- Increased traction both on land and on the road with its renewed pattern and double-angle tread structure
- Comfortable driving both in the field and on the road
- Extra protection in the tread area against fatigue and cracking thanks to the increased lug block
- Increased productivity with special pattern design
- High resistance against punctures and tears thanks to 3-layers bar structure

60 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				905	1870	182/185	D/A8	8500/9250	58	5543	829
	UR6032900302OZK	900/60 R32	TL								
65 SERIES	UR6518320302OZK	320/65 R18	TL	319	873	109	A8/B	1030	23	2612	395
	*UR6518340302OZK	340/65 R18	TL	319	873	113	A8/B	1030	23	2612	395
	*UR6524420302OZK	420/65 R24	TL	418	1156	126	A8/B	1700	23	3460	523
	UR6528420302OZK	420/65 R28	TL	418	1257	135	D	2180	35	3778	574
	UR6520440302OZK	440/65 R20	TL	441	1080	138/141	D/A8	2360/2580	35	3213	483
	UR6524440302OZK	440/65 R24	TL	441	1182	135/138	D/A8	2180/2385	35	3534	534
	UR6528440302OZK	440/65 R28	TL	445	1285	131/134	D/A8	1950/2120	35	3857	585
	UR6524480302OZK	480/65 R24	TL	479	1234	133/136	D/A8	2060/2255	23	3681	555
	UR6528480302OZK	480/65 R28	TL	479	1335	142/145	D/A8	2650/2900	35	3998	605
	UR6528540302OZK	540/65 R28	TL	550	1413	149/152	D/A8	3250/3560	35	4219	636
	UR6530540302OZK	540/65 R30	TL	550	1470	150/153	D/A8	3350/3650	35	4396	664
	UR6534540302OZK	540/65 R34	TL	550	1575	152/155	D/A8	3550/3875	35	4725	716
	UR6538540302OZK	540/65 R38	TL	550	1675	153/156	D/A8	3650/4000	35	5039	767
	UR6528600302OZK	600/65 R28	TL	601	1491	154/157	D/A8	3750/4105	35	4407	657
	UR6538600302OZK	600/65 R38	TL	601	1745	159/162	D/A8	4375/4750	35	5237	795
	UR6534650302OZK	650/65 R34	TL	601	1644	161/164	D/A8	4620/4500	35	5162	752
	UR6538650302OZK	650/65 R38	TL	650	1820	163/166	D/A8	4875/5300	35	5449	825
	UR6542650302OZK	650/65 R42	TL	650	1913	165/168	D/A8	5150/5600	35	5744	872



70 SERIES	UR7016200302OZK	200/70 R16	TL	197	686	94	A8/B	670	35	2154	317
	UR7020260302OZK	260/70 R20	TL	258	872	113	A8/B	1150	35	2738	403
	UR7016280302OZK	280/70 R16	TL	282	798	112	A8/B	1120	35	2506	345
	UR7018280302OZK	280/70 R18	TL	282	849	114	A8/B	1180	35	2666	366
	UR7020280302OZK	280/70 R20	TL	282	900	116	A8/B	1250	35	2826	387
	UR7020300302OZK	300/70 R20	TL	295	952	120/117	A8/B	1400/1285	35	2989	410
	UR7020320302OZK	320/70 R20	TL	319	982	113	A8/B	2535	23	3083	448
	UR7028320302OZK	320/70 R28	TL	319	1189	119	A8/B	1360	23	3585	547
	UR7020360302OZK	360/70 R20	TL	357	1042	129	A8/B	1850	35	3272	452
	UR7024360302OZK	360/70 R24	TL	357	1152	122/119	A8/B	1500/1360	23	3617	527
	UR7024380302OZK	380/70 R24	TL	380	1190	125/128	D/A8	1650/1800	23	3556	537
	UR7028380302OZK	380/70 R28	TL	380	1293	127/130	D/A8	1750/1910	23	3879	588
	UR7024420302OZK	420/70 R24	TL	418	1248	130/133	D/A8	1900/2080	23	3720	560
	UR7028420302OZK	420/70 R28	TL	418	1351	133/136	D/A8	2060/2250	23	4043	612
	UR7028480302OZK	480/70 R28	TL	480	1425	140/143	D/A8	2500/2730	23	4253	641
	UR7030480302OZK	480/70 R30	TL	479	1478	141/138	A8/B	2575/2360	23	4641	628
	UR7034480302OZK	480/70 R34	TL	479	1580	143/146	D/A8	2725/2980	23	4739	718
	UR7038480302OZK	480/70 R38	TL	480	1685	145/148	D/A8	2900/3170	23	5067	771
	UR7030520302OZK	520/70 R30	TL	516	1536	145/142	A8/B	2900/2720	23	4823	698
	UR7034520302OZK	520/70 R34	TL	516	1640	148/151	D/A8	3150/3440	23	4908	742
	UR7038520302OZK	520/70 R38	TL	516	1749	150	D	3350	23	5223	793
	UR7038580302OZK	580/70 R38	TL	577	1827	155	D	3875	23	5441	823
	UR7042580302OZK	580/70 R42	TL	587	1879	158	A8/B	4250	23	5900	812
	UR7030600302OZK	600/70 R30	TL	601	1602	161/158	D/A8	4620/4250	35	5030	725
	UR7034600302OZK	600/70 R34	TL	601	1704	160	A8/B	4500	35	5351	776
	*UR7038620302OZK	620/70 R38	TL	625	1833	170	A8/B	6000	23	5486	830
	UR7046620302OZK	620/70 R46	TL	625	2036	162/165	D/A8	4750/5200	23	6124	931
	UR7038710302OZK	710/70 R38	TL	716	1959	171/174	D/A8	6150/6730	35	5842	880
	UR7042710302OZK	710/70 R42	TL	716	2061	173/176	D/A8	6500/7120	35	6162	931

THE ART OF MOVING FORWARD

AGROLOX

RADIAL TRACTOR TYRES

75 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	*UR7538650302OZK	650/75 R38	TL	645	1941	169	D	5800	35	5791	873
	*UR7542650302OZK	650/75 R42	TL	645	2043	170	D	6000	35	6112	924

80 SERIES	*UR8036270302OZK	270/80 R36	TL	275	1346	134	A8/B	2120	58	4093	630
	*UR8046420302OZK	420/80 R46	TL	418	1840	159	D	4375	52	5570	853

85 SERIES	UR8520280302OZK	280/85 R20	TL	282	984	112/109	A8/B	1120/1030	23	3090	421
	UR8524320302OZK	320/85 R24	TL	319	1176	122/119	A8/B	1500/1360	23	3690	539
	UR8524340302OZK	340/85 R24	TL	343	1188	125/122	A8/B	1650/1500	23	3730	542
	UR8524380302OZK	380/85 R24	TL	380	1256	131/128	A8/B	1950/1800	23	3944	570
	*UR8526420302OZK	420/85 R26	TL	418	1374	138	A8/B	2360	23	4092	616
	*UR8526460302OZK	460/85 R26	TL	455	1442	143	A8/B	2725	23	4285	643
	UR8528280302OZK	280/85 R28	TL	282	1187	118/115	A8/B	1320/1215	23	3727	551
	UR8528380302OZK	380/85 R28	TL	380	1357	133/130	A8/B	2600/1900	23	4260	620
	UR8528420302OZK	420/85 R28	TL	418	1425	139	A8/B	2430	23	4252	641
	UR8534320302OZK	320/85 R34	TL	319	1408	141/138	A8/B	2570/2360	52	5531	836
	UR8534380302OZK	380/85 R34	TL	380	1510	137	A8/B	2300	23	4741	697
	UR8538460302OZK	460/85 R38	TL	455	1747	149/146	A8/B	3250/3000	23	5486	803
	UR8538520302OZK	520/85 R38	TL	516	1849	155	A8/B	3880	23	5531	836
	UR8538520302OZR	520/85 R38 REINFORCED FOR HARVESTER	TL	516	1849	169	A8/B	5800	52	5531	836
	*UR8542300302OZK	300/85 R42	TL	295	1577	144	A8/B	2800	58	4794	737
UR8542520302OZK	520/85 R42	TL	516	1951	157	A8/B	4130	23	5851	887	

90 SERIES	UR9042320302OZK	320/90 R42	TL	319	1643	139	A8/B	2430	23	5159	696
	UR9030420302OZK	420/90 R30	TL	418	1518	147	A8/B	3080	35	4531	683

95 SERIES	*UR9516210302OZK	210/95 R16	TL	215	806	106	A8/B	950	35	2407	363
	*UR9518210302OZK	210/95 R18	TL	215	857	108	A8/B	1000	35	2567	389
	*UR9540230302OZK	230/95 R40	TL	228	1454	122	A8/B	1500	35	4566	688

ÖZKA

THE ART OF MOVING FORWARD

AGROLOX

RADIAL TRACTOR TYRES

THE ART OF MOVING FORWARD

AGRO10

RADIAL TRACTOR TYRES

75 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	*UR7538650302OZK	650/75 R38	TL	645	1941	169	D	5800	35	5791	873
	*UR7542650302OZK	650/75 R42	TL	645	2043	170	D	6000	35	6112	924

80 SERIES	*UR8036270302OZK	270/80 R36	TL	275	1346	134	A8/B	2120	58	4093	630
	*UR8046420302OZK	420/80 R46	TL	418	1840	159	D	4375	52	5570	853

85 SERIES	UR8520280302OZK	280/85 R20	TL	282	984	112/109	A8/B	1120/1030	23	3090	421
	UR8524320302OZK	320/85 R24	TL	319	1176	122/119	A8/B	1500/1360	23	3690	539
	UR8524340302OZK	340/85 R24	TL	343	1188	125/122	A8/B	1650/1500	23	3730	542
	UR8524380302OZK	380/85 R24	TL	380	1256	131/128	A8/B	1950/1800	23	3944	570
	*UR8526420302OZK	420/85 R26	TL	418	1374	138	A8/B	2360	23	4092	616
	*UR8526460302OZK	460/85 R26	TL	455	1442	143	A8/B	2725	23	4285	643
	UR8528280302OZK	280/85 R28	TL	282	1187	118/115	A8/B	1320/1215	23	3727	551
	UR8528380302OZK	380/85 R28	TL	380	1357	133/130	A8/B	2600/1900	23	4260	620
	UR8528420302OZK	420/85 R28	TL	418	1425	139	A8/B	2430	23	4252	641
	UR8534320302OZK	320/85 R34	TL	319	1408	141/138	A8/B	2570/2360	52	5531	836
	UR8534380302OZK	380/85 R34	TL	380	1510	137	A8/B	2300	23	4741	697
	UR8538460302OZK	460/85 R38	TL	455	1747	149/146	A8/B	3250/3000	23	5486	803
	UR8538520302OZK	520/85 R38	TL	516	1849	155	A8/B	3880	23	5531	836
	UR8538520302OZR	520/85 R38 REINFORCED FOR HARVESTER	TL	516	1849	169	A8/B	5800	52	5531	836
	*UR8542300302OZK	300/85 R42	TL	295	1577	144	A8/B	2800	58	4794	737
UR8542520302OZK	520/85 R42	TL	516	1951	157	A8/B	4130	23	5851	887	

90 SERIES	UR9042320302OZK	320/90 R42	TL	319	1643	139	A8/B	2430	23	5159	696
	UR9030420302OZK	420/90 R30	TL	418	1518	147	A8/B	3080	35	4531	683

95 SERIES	*UR9516210302OZK	210/95 R16	TL	215	806	106	A8/B	950	35	2407	363
	*UR9518210302OZK	210/95 R18	TL	215	857	108	A8/B	1000	35	2567	389
	*UR9540230302OZK	230/95 R40	TL	228	1454	122	A8/B	1500	35	4566	688

ÖZKA

THE ART OF MOVING FORWARD

AGRO10

RADIAL TRACTOR TYRES

THE ART OF MOVING FORWARD

AGRO10

RADIAL TRACTOR TYRES

75 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	*UR7538650302OZK	650/75 R38	TL	645	1941	169	D	5800	35	5791	873
	*UR7542650302OZK	650/75 R42	TL	645	2043	170	D	6000	35	6112	924

80 SERIES	*UR8036270302OZK	270/80 R36	TL	275	1346	134	A8/B	2120	58	4093	630
	*UR8046420302OZK	420/80 R46	TL	418	1840	159	D	4375	52	5570	853

85 SERIES	UR8520280302OZK	280/85 R20	TL	282	984	112/109	A8/B	1120/1030	23	3090	421
	UR8524320302OZK	320/85 R24	TL	319	1176	122/119	A8/B	1500/1360	23	3690	539
	UR8524340302OZK	340/85 R24	TL	343	1188	125/122	A8/B	1650/1500	23	3730	542
	UR8524380302OZK	380/85 R24	TL	380	1256	131/128	A8/B	1950/1800	23	3944	570
	*UR8526420302OZK	420/85 R26	TL	418	1374	138	A8/B	2360	23	4092	616
	*UR8526460302OZK	460/85 R26	TL	455	1442	143	A8/B	2725	23	4285	643
	UR8528280302OZK	280/85 R28	TL	282	1187	118/115	A8/B	1320/1215	23	3727	551
	UR8528380302OZK	380/85 R28	TL	380	1357	133/130	A8/B	2600/1900	23	4260	620
	UR8528420302OZK	420/85 R28	TL	418	1425	139	A8/B	2430	23	4252	641
	UR8534320302OZK	320/85 R34	TL	319	1408	141/138	A8/B	2570/2360	52	5531	836
	UR8534380302OZK	380/85 R34	TL	380	1510	137	A8/B	2300	23	4741	697
	UR8538460302OZK	460/85 R38	TL	455	1747	149/146	A8/B	3250/3000	23	5486	803
	UR8538520302OZK	520/85 R38	TL	516	1849	155	A8/B	3880	23	5531	836
	UR8538520302OZR	520/85 R38 REINFORCED FOR HARVESTER	TL	516	1849	169	A8/B	5800	52	5531	836
	*UR8542300302OZK	300/85 R42	TL	295	1577	144	A8/B	2800	58	4794	737
UR8542520302OZK	520/85 R42	TL	516	1951	157	A8/B	4130	23	5851	887	

90 SERIES	UR9042320302OZK	320/90 R42	TL	319	1643	139	A8/B	2430	23	5159	696
	UR9030420302OZK	420/90 R30	TL	418	1518	147	A8/B	3080	35	4531	683

95 SERIES	*UR9516210302OZK	210/95 R16	TL	215	806	106	A8/B	950	35	2407	363
	*UR9518210302OZK	210/95 R18	TL	215	857	108	A8/B	1000	35	2567	389
	*UR9540230302OZK	230/95 R40	TL	228	1454	122	A8/B	1500	35	4566	688

ÖZKA

THE ART OF MOVING FORWARD

AGRO10

RADIAL TRACTOR TYRES

THE ART OF MOVING FORWARD

AGRO10

RADIAL TRACTOR TYRES

75 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	*UR7538650302OZK	650/75 R38	TL	645	1941	169	D	5800	35	5791	873
	*UR7542650302OZK	650/75 R42	TL	645	2043	170	D	6000	35	6112	924

80 SERIES	*UR8036270302OZK	270/80 R36	TL	275	1346	134	A8/B	2120	58	4093	630
	*UR8046420302OZK	420/80 R46	TL	418	1840	159	D	4375	52	5570	853

85 SERIES	UR8520280302OZK	280/85 R20	TL	282	984	112/109	A8/B	1120/1030	23	3090	421
	UR8524320302OZK	320/85 R24	TL	319	1176	122/119	A8/B	1500/1360	23	3690	539
	UR8524340302OZK	340/85 R24	TL	343	1188	125/122	A8/B	1650/1500	23	3730	542
	UR8524380302OZK	380/85 R24	TL	380	1256	131/128	A8/B	1950/1800	23	3944	570
	*UR8526420302OZK	420/85 R26	TL	418	1374	138	A8/B	2360	23	4092	616
	*UR8526460302OZK	460/85 R26	TL	455	1442	143	A8/B	2725	23	4285	643
	UR8528280302OZK	280/85 R28	TL	282	1187	118/115	A8/B	1320/1215	23	3727	551
	UR8528380302OZK	380/85 R28	TL	380	1357	133/130	A8/B	2600/1900	23	4260	620
	UR8528420302OZK	420/85 R28	TL	418	1425	139	A8/B	2430	23	4252	641
	UR8534320302OZK	320/85 R34	TL	319	1408	141/138	A8/B	2570/2360	52	5531	836
	UR8534380302OZK	380/85 R34	TL	380	1510	137	A8/B	2300	23	4741	697
	UR8538460302OZK	460/85 R38	TL	455	1747	149/146	A8/B	3250/3000	23	5486	803
	UR8538520302OZK	520/85 R38	TL	516	1849	155	A8/B	3880	23	5531	836
	UR8538520302OZR	520/85 R38 REINFORCED FOR HARVESTER	TL	516	1849	169	A8/B	5800	52	5531	836
	*UR8542300302OZK	300/85 R42	TL	295	1577	144	A8/B	2800	58	4794	737
UR8542520302OZK	520/85 R42	TL	516	1951	157	A8/B	4130	23	5851	887	

90 SERIES	UR9042320302OZK	320/90 R42	TL	319	1643	139	A8/B	2430	23	5159	696
	UR9030420302OZK	420/90 R30	TL	418	1518	147	A8/B	3080	35	4531	683

95 SERIES	*UR9516210302OZK	210/95 R16	TL	215	806	106	A8/B	950	35	2407	363
	*UR9518210302OZK	210/95 R18	TL	215	857	108	A8/B	1000			

AGRÖ10

RADIAL
TRACTOR TYRES

80 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	UR8042480102OZK	480/80 R42	TL	485	1845	151/148	A8/B	3450/3150	23	5552	845
	UR8046480102OZK	480/80 R46	TL	485	1945	164/164	A8/B	5000/5000	46	5866	895

85 SERIES		Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	psi		
		UR8524250102OZK	250/85 R24 (9.5 R24)	TL	251	1036	109/109	A8/B	1030/1030	23	3121	475
		UR8528250102OZK	250/85 R28 (9.5 R28)	TL	251	1137	112/112	A8/B	1120/1120	23	3406	516
		UR8520280102OZK	280/85 R20 (11.2 R20)	TL	282	984	112/109	A8/B	1130/1030	23	2942	444
		UR8524280102OZK	280/85 R24 (11.2 R24)	TL	282	1086	115/112	A8/B	1215/1120	23	3262	495
		UR8528280102OZK	280/85 R28 (11.2 R28)	TL	282	1187	118/115	A8/B	1320/1215	23	3580	546
		UR8520320102OZK	320/85 R20 (12.4 R20)	TL	319	1052	119/116	A8/B	1360/1250	23	3134	472
		UR8524320102OZK	320/85 R24 (12.4 R24)	TL	319	1154	122/119	A8/B	1500/1360	23	3454	523
		UR8528320102OZK	320/85 R28 (12.4 R28)	TL	320	1255	124/121	A8/B	1600/1450	23	3772	573
		UR8532320102OZK	320/85 R32 (12.4 R32)	TL	320	1365	126/126	A8/B	1700/1700	35	3883	554
		UR8536320102OZK	320/85 R36 (12.4 R36)	TL	320	1465	128/125	A8/B	1800/1650	23	4429	677
		UR8538320102OZK	320/85 R38 (12.4 R38)	TL	320	1515	143/143	A8/B	2725/2725	52	4587	703
		UR8524340102OZK	340/85 R24 (13.6 R24)	TL	343	1188	125/122	A8/B	1650/1500	23	3551	536
		UR8528340102OZK	340/85 R28 (13.6 R28)	TL	343	1289	127/124	A8/B	1750/1600	23	3868	587
		UR8536340102OZK	340/85 R36 (13.6 R36)	TL	343	1495	132/129	A8/B	2000/1850	23	4514	689
		UR8538340102OZK	340/85 R38 (13.6 R38)	TL	343	1545	133/130	A8/B	2060/1900	23	4672	715
		UR8546340102OZK	340/85 R46 (13.6 R46)	TL	345	1756	150/153	D/A8	3350/3650	52	5332	819
		UR8548340102OZK	340/85 R48 (13.6 R48)	TL	343	1800	151/154	D/A8	3450/3750	58	5472	842
		UR8524380102OZK	380/85 R24 (14.9 R24)	TL	380	1256	131/128	A8/B	1950/1850	23	3743	563
		UR8528380102OZK	380/85 R28 (14.9 R28)	TL	380	1357	133/130	A8/B	2060/1900	23	4060	614
		UR8530380102OZK	380/85 R30 (14.9 R30)	TL	380	1408	135/132	A8/B	2180/2000	23	4220	639
		UR8538380102OZK	380/85 R38 (14.9 R38)	TL	380	1611	139/136	A8/B	2430/2220	23	4858	741
		UR8524420102OZK	420/85 R24 (16.9 R24)	TL	418	1324	137/134	A8/B	2300/2120	23	3935	591
		UR8528420102OZK	420/85 R28 (16.9 R28)	TL	418	1425	139/136	A8/B	2430/2240	23	4253	641
		UR8530420102OZK	420/85 R30 (16.9 R30)	TL	418	1476	140/137	A8/B	2500/2300	23	4413	667
		UR8534420102OZK	420/85 R34 (16.9 R34)	TL	418	1578	142/138	A8/B	2650/2360	23	4733	718
		UR8538420102OZK	420/85 R38 (16.9 R38)	TL	418	1679	144/141	A8/B	2800/2575	23	5050	768
		UR8530460102OZK	460/85 R30 (18.4 R30)	TL	455	1544	145/142	A8/B	2900/2650	23	4605	694
		UR8534460102OZK	460/85 R34 (18.4 R34)	TL	455	1646	147/144	A8/B	3075/2800	23	4925	745
		UR8538460102OZK	460/85 R38 (18.4 R38)	TL	455	1747	149/146	A8/B	3250/3000	23	5243	795
		UR8538460102OZR	460/85 R38 REINFORCED FOR HARVESTER	TL	455	1747	149/146	A8/B	3250/3000	23	5243	795
		UR8538520102OZK	520/85 R38 (20.8 R38)	TL	516	1849	155/152	A8/B	3875/3550	23	5531	836
		UR8538520102OZR	520/85 R38 REINFORCED FOR HARVESTER	TL	516	1849	169	A8	5800	23	5531	836
		UR8542520102OZK	520/85 R42 (20.8 R42)	TL	516	1955	157/157	A8/B	4125/4125	23	5863	889
		UR8542520102OZR	520/85 R42 CHO	TL	516	1955	167	A8	5450	23	5863	889
		UR8538650102OZK	650/85 R38	TL	650	2071	173/176	D/A8	6500/7100	35	6159	925

90 SERIES		Product Code	Tyre Size	TT/ TL	Section Width	Overall Diameter	Load Index	Speed Symbol	Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
		UR9046320102OZK	320/90 R46	TL	320	1750	145/148	D/A8	2900/3150	46	5315	817
		UR9050320102OZK	320/90 R50	TL	320	1850	150/150	A8/B	3350/3350	52	5630	867
		UR9054320102OZK	320/90 R54	TL	320	1950	155/155	A8/B	3875/3875	58	5944	917
		UR9046380102OZK	380/90 R46	TL	380	1860	159/162	D/A8	4375/4750	58	5626	861

95 SERIES		Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
					Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
					mm	mm			kg	psi		
		UR0020095102OZK	9.5 R20	TL	241	938	108/105	A8/B	1000/925	23	2652	375
		UR9532210102OZK	210/95 R32	TL	215	1215	116/120	D/A8	1250/1400	35	3691	567
		UR9536210102OZK	210/95 R36	TL	215	1320	118/121	D/A8	1800/1950	58	4019	619
		UR9544210102OZK	210/95 R44	TL	215	1520	126/129	D/A8	1700/1850	35	4649	720
		UR9532230102OZK	230/95 R32	TL	230	1255	128/131	D/A8	1800/1950	58	3804	583
		UR9536230102OZK	230/95 R36	TL	230	1355	130/133	D/A8	1900/2060	58	4118	633
		UR9542230102OZK	230/95 R42	TL	230	1505	133/136	D/A8	2060/2240	58	4590	709
		UR9544230102OZK	230/95 R44	TL	230	1560	134/137	D/A8	2120/2300	58	4762	736
		UR9548230102OZK	230/95 R48	TL	230	1660	136/139	D/A8	2240/2430	58	5077	786
		UR9532270102OZK	270/95 R32	TL	275	1330	133/136	D/A8	2060/2240	58	4016	613
		UR9536270102OZK	270/95 R36	TL	275	1435	136/139	D/A8	2240/2430	58	4329	665
		UR9538270102OZK	270/95 R38	TL	275	1485	137/140	D/A8	2300/2500	58	4502	691
		UR9542270102OZK	270/95 R42	TL	275	1581	141/138	A8/B	2575/2360	58	4788	737
		UR9544270102OZK	270/95 R44	TL	275	1635	142/145	D/A8	2650/2900	58	4974	766
		UR9546270102OZK	270/95 R46	TL	275	1685	141/144	D/A8	2575/2800	58	5131	791
		UR9548270102OZK	270/95 R48	TL	275	1735	142/145	D/A8	2650/2900	58	5289	816
		UR9554270102OZK	270/95 R54	TL	275	1885	146/149	D/A8	3000/3250	58	5761	891
		UR9546300102OZK	300/95 R46	TL	300	1740	148/151	D/A8	3150/3450	58	5287	813
		UR9552300102OZK	300/95 R52	TL	300	1900	156/159	D/A8	4000/4375	58	5787	892

AGRÖ11

RADIAL
TRACTOR TYRES

- Comfortable drive due to flexible sidewall structure
- Mud repellent feature with its specially designed tread pattern
- High performance due to deep treads and wide base track



70 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	UR7042620112OZK	620/70 R42	TL	625	1935	166/166	A8/B	5300/5300	35	5806	881

75 SERIES		Product Code	Tyre Size	TT/ TL	Section Width	Overall Diameter	Load Index	Speed Symbol	Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference	Static Loaded Radius
		UR7526620112OZK	620/75 R26	TL	630	1600	166/166	A8/B	5300/5300	46	4731	706
		UR7530620112OZK	620/75 R30	TL	630	1695	163/161	A8/B	4875/4625	35	5032	754
		UR7532650112OZK	650/75 R32	TL	650	1795	172/172	A8/B	6300/6300	46	5331	799

AGRIGOR20

RADIAL
FLOTATION TYRES

- Ideal for all terrain conditions with its reinforced bead design
- Low soil compact feature thanks to its wide base
- Self-cleaning thanks to its non-directional tread pattern
- Reinforced tread and sidewall profiles against punctures



45 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	UR4522560202OZK	560/45 R22.5	TL	564	1076	152	D	3550	58	3222	488

50 SERIES		Product Code	Tyre Size	TT/ TL	Section Width	Overall Diameter	Load Index	Speed Symbol	Tyre Load Capacity	Tyre Pressure At Max. Load	Dynamic Rolling Circumference</
-----------	--	--------------	-----------	-----------	---------------	------------------	------------	--------------	--------------------	----------------------------	---------------------------------



STAGRI

RADIAL
FLOTATION
TYRES

STEEL
BELTED

- Directional tread pattern and optimized crown radius provides improved traction and efficient self-cleaning along with good flotation characteristics.
- Robust radial construction and engineered tread compound ensures good roadability with improved mileage and consistent performance on farmland and roads.
- Reinforced bead and steel belts offers enhanced durability and excellent stability.



STRIVEX

RADIAL
FLOTATION
TYRES

STEEL
BELTED

- Balanced non-directional pattern offers excellent soil protection
- Tuned footprint ensures smooth and comfortable maneuvers and low rolling resistance
- Strong & durable casing with steel belts provides high load carrying capacity and working speed

50 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius		50 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius	
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load								Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load			
	*UR5022650212OZK	650/50 R22.5	TL	629	1220	163	D	4875	58	3685	544			*UR5022650222OZK	650/50 R22.5	TL	629	1220	163	D	4875	58	3685	544	

55 SERIES	*UR5526600212OZK	600/55 R26.5	TL	606	1325	165	D	5150	58	4050	598		55 SERIES	*UR5526600222OZK	600/55 R26.5	TL	606	1325	165	D	5150	58	4050	598	
	*UR5526650212OZK	650/55 R26.5	TL	629	1380	169	D	6700	58	4199	620			*UR5526650222OZK	650/55 R26.5	TL	629	1380	169	D	6700	58	4199	620	

60 SERIES	*UR6022560212OZK	560/60 R22.5	TL	550	1245	165	D	4625	58	3746	553		60 SERIES	*UR6022560222OZK	560/60 R22.5	TL	547	1245	165	D	4625	58	3746	553	
--------------	------------------	--------------	----	-----	------	-----	---	------	----	------	-----	--	--------------	------------------	--------------	----	-----	------	-----	---	------	----	------	-----	--

65 SERIES	*UR6522580212OZK	580/65 R22.5	TL	566	1325	166	D	5300	58	3962	585		65 SERIES	*UR6522580222OZK	580/65 R22.5	TL	566	1325	166	D	5300	58	3962	585	
	*UR6530650212OZK	650/65 R30.5	TL	629	1620	176	D	7100	58	4199	620			*UR6530650222OZK	650/65 R30.5	TL	629	1620	176	D	7100	58	4911	725	



THE ART OF HIGH TRACTION

Experience the high traction with special design of Özka Tyres.

ÖZKA



AGRIGOR20  **NTR**


THE ART OF ENGINEERING

Bringing the power of nature and technology together, AGRIGOR20 NTR sets a new standard in agricultural tyres. Enhanced with lavender oil, AGRIGOR20 NTR does not only deliver exceptional performance but also stands out with its unique lavender scent.

**AGROLOX-S**

THE ART OF SUSTAINABILITY

AGROLOX-S stands out as an innovative solution offering sustainability and high performance to the agricultural tyre sector. Made with 55% recyclable materials, AGROLOX-S adapts to tough conditions while providing farmers with long-lasting durability.

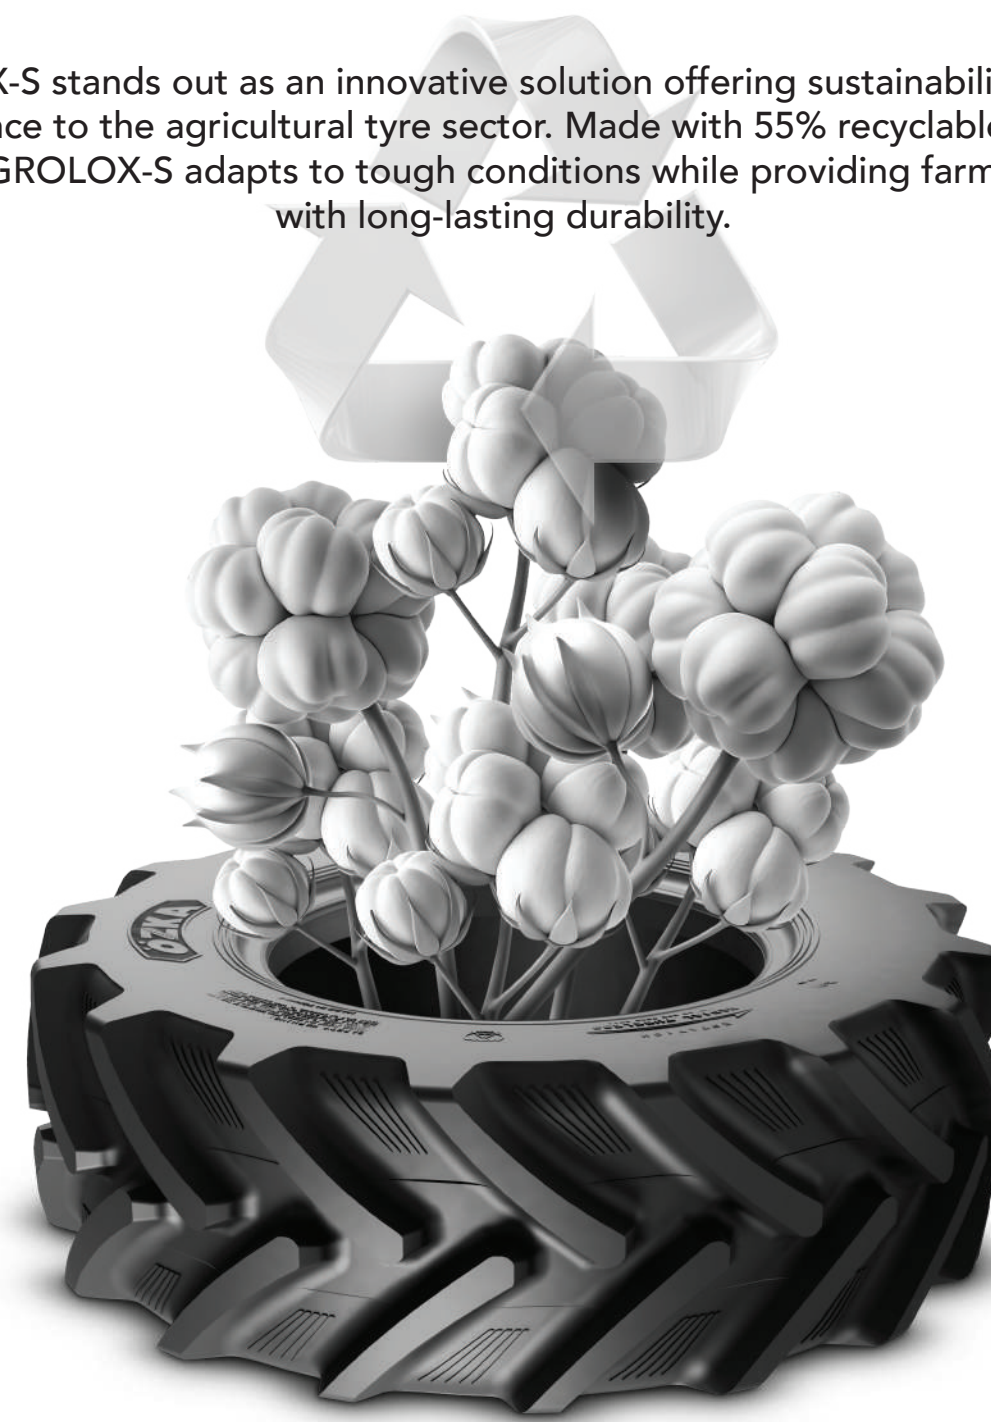



KNK30

FRONT TRACTOR TYRES

- Tractor front tyre for general use
- Resistance to stone and impacts thanks to strong and robust body
- Smooth driving with gutters at central tread
- Prevention of skidding thanks to treads in shoulders
- Long lasting and economic use
- Excellent performance in highway and land



KNK33

FRONT TRACTOR TYRES

- Extra strong with its increased tread depth
- Comfortable driving in the field and on the road by pattern design
- Mud-free pattern

KNK30	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
KNK30	U3162011OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	U3162021OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	U3163011OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	U3163021OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	U3164011OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164021OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363

KNK33	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
KNK33	U3162111OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	U3162121OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	U3163111OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	U3163121OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	U3164211OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164221OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	U3191011OZK	6.00-19 6PR	TT	165	814	93	A6	650	48	2453	374



KNK32

FRONT TRACTOR TYRES

- Long lasting front tractor tyre
- High maneuverability thanks to nondirectional use feature
- Resistant structure against punctures thanks to increased tread depth

KNK32	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
KNK32	U3164111OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164121OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	U3181021OZK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
	U3201021OZK	6.50-20 8PR	TT	175	865	102	A6	850	54	2605	397
	U3202021OZK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417



KNK35

FRONT TRACTOR TYRES

- Suitable to asphalt and land usage
- Excellent maneuverability and nondirectional use
- Resistant structure against punctures
- Straight movement stability in soft land

KNK35	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
KNK35	U3161011OZK	5.50-16 6PR	TT	150	710	86	A6	530	54	2135	325
	U3161021OZK	5.50-16 8PR	TT	150	710	91	A6	615	54	2135	325
	U3162211OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	U3162221OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	U3163211OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	U3163221OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	U3164311OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164321OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	U3166021OZK	9.00-16 8PR	TT	234	855	111	A6	1090	45	2545	383
	U3167021OZK	10.00-16 8PR	TT	274	895	115	A6	1215	41	2658	399
	U3168021OZK	11.00-16 8PR	TT	315	965	118	A6	1320	36	2856	427
	U3181221OZK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390



KNK50

FRONT TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U3151021OZK	7.50-15 8PR	TT	205	780	99	A6	775	52	2325	350
U3162311OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
U3162321OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
U3163311OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
U3163321OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
U3164421OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
U3181421OZK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
U3202121OZK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417
U3203011OZK	9.5-20 6PR	TT	241	940	101	A6	825	30	2817	427
U3203021OZK	9.5-20 8PR	TT	241	940	106	A6	950	35	2817	427
U3203022OZK	9.5-20 8PR	TL	241	940	106	A6	950	35	2817	427
U3204021OZK	11.2-20 8PR	TT	285	1005	113	A6	1150	38	3001	453
U3204022OZK	11.2-20 8PR	TL	285	1005	113	A6	1150	38	3001	453



KNK50

REAR TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U5241011OZK	8.3-24 6PR	TT	210	1009	105	A6	925	30	3044	465
U5241021OZK	8.3-24 8PR	TT	210	1009	108	A6	1000	35	3044	465
U5242011OZK	9.50-24 6PR	TT	241	1050	110	A6	1060	26	3160	481
U5242021OZK	9.50-24 8PR	TT	241	1050	116	A6	1250	34	3160	481
U5243011OZK	11.2-24 6PR	TT	284	1105	110	A6	1060	26	3316	503
U5243021OZK	11.2-24 8PR	TT	284	1105	116	A6	1250	34	3316	503
U5243041OZK	11.2-24 12PR	TT	284	1105	122	A6	1500	40	3316	503
U5244011OZK	12.4-24 6PR	TT	315	1160	115	A6	1215	24	3471	525
U5244021OZK	12.4-24 8PR	TT	315	1160	118	A6	1320	29	3471	525
U5244121OZK	320/85-24 8PR	TT	315	1160	118	A6	1320	29	3471	525
U5244041OZK	12.4-24 12PR	TT	315	1160	124	A6	1600	35	3471	525
U5244141OZK	320/85-24 12PR	TT	315	1160	124	A6	1600	35	3471	525
U5245011OZK	13.6-24 6PR	TT	345	1210	120	A6	1400	22	3613	545
U5245021OZK	13.6-24 8PR	TT	345	1210	123	A6	1550	28	3613	545
U5245041OZK	13.6-24 12PR	TT	345	1210	129	A6	1850	34	3613	545
U5246011OZK	14.9-24 6PR	TT	378	1265	125	A6	1650	20	3768	567
U5246021OZK	14.9-24 8PR	TT	378	1265	128	A6	1800	26	3768	567
U5246121OZK	380/85-24 8PR	TT	378	1265	128	A6	1800	26	3768	567
U5246031OZK	14.9-24 10PR	TT	378	1265	131	A6	1950	30	3768	567
U5246131OZK	380/85-24 10PR	TT	378	1265	131	A6	1950	30	3768	567
U5246051OZK	14.9-24 14PR	TT	378	1265	137	A6	2300	38	3768	567
U5248021OZK	16.9-24 8PR	TT	429	1335	133	A6	2060	25	3966	595
U5248031OZK	16.9-24 10PR	TT	429	1335	136	A6	2240	29	3966	595
U5248051OZK	16.9-24 14PR	TT	429	1335	141	A6	2575	35	3966	595
U5247042OZK	15.5/80-24 12PR	TL	394	1260	157	A6	4125	44	3754	565
U5247062OZK	15.5/80-24 16PR	TL	394	1260	163	A6	4875	58	3754	565
U5261031OZK	14.9-26 10PR	TT	378	1315	133	A6	2060	30	3926	592
U5262031OZK	18.4-26 10PR	TT	467	1461	142	A6	2650	26	4338	650
U5262061OZK	18.4-26 16PR	TT	467	1461	153	A6	3650	44	4338	650
U5262161OZK	18.4-26 16PR (AGRO - FORESTRY)	TT	467	1461	153	A6	3650	44	4338	650
U5261051OZK	14.9-26 14PR	TT	378	1315	140	A6	2500	39	3926	592
U5281011OZK	11.2-28 6PR	TT	284	1205	112	A6	1120	26	3630	553
U5281021OZK	11.2-28 8PR	TT	284	1205	118	A6	1320	34	3630	553
U5282011OZK	12.4-28 6PR	TT	315	1260	117	A6	1285	25	3786	575
U5282021OZK	12.4-28 8PR	TT	315	1260	125	A6	1650	30	3786	575
U5282221OZK	320/85-28 8PR	TT	315	1260	125	A6	1650	30	3786	575
U5283011OZK	13.6-28 6PR	TT	345	1310	121	A6	1450	23	3927	595
U5283021OZK	13.6-28 8PR	TT	345	1310	125	A6	1650	29	3927	595

KNK50

REAR
TRACTOR TYRES

KNK50	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U5284011OZK	14.9-28 6PR	TT	378	1365	125	A6	1650	20	4083	617
	U5284021OZK	14.9-28 8PR	TT	378	1365	130	A6	1900	26	4083	617
	U5284051OZK	14.9-28 14PR	TT	378	1365	143	A6	2725	40	4083	617
	U5285021OZK	16.9-28 8PR	TT	429	1435	135	A6	2180	24	4281	645
	U5285031OZK	16.9-28 10PR	TT	429	1435	139	A6	2430	29	4281	645
	U5285051OZK	16.9-28 14PR	TT	429	1435	143	A6	2725	34	4281	645
	U5301021OZK	14.9-30 8PR	TT	378	1415	132	A6	2000	26	4240	642
	U5301031OZK	14.9-30 10PR	TT	378	1415	136	A6	2240	29	4240	642
	U5302021OZK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
	U5302031OZK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
	U5302051OZK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
	U5302151OZK	420/85-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
	U5303021OZK	18.4-30 8PR	TT	467	1550	139	A6	2430	20	4622	696
	U5303121OZK	460/85-30 8PR	TT	467	1550	139	A6	2430	20	4622	696
	U5303031OZK	18.4-30 10PR	TT	467	1550	145	A6	2900	26	4622	696
	U5303131OZK	460/85-30 10PR	TT	467	1550	145	A6	2900	26	4622	696
	U5303051OZK	18.4-30 14PR	TT	467	1550	154	A6	3750	40	4622	696
	U5303151OZK	460/85-30 14PR	TT	467	1550	154	A6	3750	40	4622	696
	U5321021OZK	8.3-32 8PR	TT	211	1195	111	A6	1090	46	3634	559
	U5322021OZK	9.5-32 8PR	TT	241	1250	115	A6	1215	39	3790	581
	U5323021OZK	12.4-32 8PR	TT	315	1360	125	A6	1650	32	4101	625
	U5341031OZK	16.9-34 10PR	TT	429	1585	142	A6	2650	29	4753	720
	U5341131OZK	420/85-34 10PR	TT	429	1585	142	A6	2650	29	4753	720
	U5341051OZK	16.9-34 14PR	TT	429	1585	148	A6	3150	37	4753	720
	U5341151OZK	420/85-34 14PR	TT	429	1585	148	A6	3150	37	4753	720
	U5342031OZK	18.4-34 10PR	TT	467	1650	146	A6	3000	26	4937	746
	U5342131OZK	460/85-34 10PR	TT	467	1650	146	A6	3000	26	4937	746
	U5342051OZK	18.4-34 14PR	TT	467	1650	153	A6	3650	36	4937	746
	U5361011OZK	12.4-36 6PR	TT	315	1465	121	A6	1450	24	4429	677
	U5361021OZK	12.4-36 8PR	TT	315	1465	126	A6	1700	29	4429	677
	U5362011OZK	13.6-36 6PR	TT	345	1515	125	A6	1650	23	4571	697
	U5362021OZK	13.6-36 8PR	TT	345	1515	129	A6	1850	29	4571	697
	U5381021OZK	12.4-38 8PR	TT	315	1515	127	A6	1750	29	4587	703
	U5382011OZK	13.6-38 6PR	TT	345	1565	126	A6	1700	23	4728	723
	U5382021OZK	13.6-38 8PR	TT	345	1565	131	A6	1950	29	4728	723
	U5382031OZK	13.6-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
	U5383021OZK	14.00-38 8PR	TT	345	1565	131	A6	1950	29	4728	723
	U5383031OZK	14.00-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
	U5384031OZK	15.5-38 10PR	TT	394	1570	138	A6	2360	33	4742	725
	U5384041OZK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
	U5385031OZK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771
	U5385051OZK	16.9-38 14PR	TT	429	1685	152	A6	3550	40	5067	771
	U5386031OZK	18.4-38 10PR	TT	467	1750	147	A6	3075	26	5251	797
	U5386051OZK	18.4-38 14PR	TT	467	1750	154	A6	3750	36	5251	797
	U5262051OZK	18.4-26 14PR	TT	467	1461	150	A6	3350	40	4338	650



KNK53

REAR
TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK53

KNK53	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U5302221OZK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
	U5302231OZK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
	U5302241OZK	16.9-30 12PR	TT	429	1485	147	A6	3075	31	4438	670
	U5302251OZK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
	U5384141OZK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
	U5385131OZK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771



KNK57

IRRIGATION
TYRES

NEW
PATTERN

- Superior traction and high ground stability
- Minimum rolling circumference, delivering superior performance and reduced energy consumption
- Optimized design, providing a powerful and efficient solution for modern irrigation systems

KNK57

KNK57	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U5246421OZK	14.9-24 8PR	TT	370	1230	128	A6	1800	26	3671	558
	U5246422OZK	14.9-24 8PR	TL	370	1230	128	A6	1800	26	3671	558



KNK55

IRRIGATION
TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK55	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U5243111OZK	11.2-24 6PR (IRRIGATION)	TT	284	1105	110	A6	1060	26	3316	503
	U5243121OZK	11.2-24 8PR (IRRIGATION)	TT	284	1105	116	A6	1250	34	3316	503
	U5380911OZK	11.2-38 6PR (IRRIGATION)	TT	284	1450	117	A6	1285	19	4403	677
	U5380921OZK	11.2-38 8PR (IRRIGATION)	TT	284	1450	122	A6	1500	26	4403	677



KNK48

HARVESTER
TYRES

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK48	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U4181041OZK	10.5/80-18 12PR	TT	274	885	135/123	A8	2180	65	2646	400
	U4182051OZK	12.5/80-18 14PR	TT	308	965	144/131	A8	2800	62	2872	432
	U4183061OZK	13.0/65-18 16PR	TT	336	890	144/131	A8	2800	71	2660	402



KNK36

HARVESTER
TYRES

- Easy rolling resistance with five-rib design
- Suitable for both on and off road application
- Designed for field / road transport and soil tillage operations with implement machinery and trailers
- Good flotation properties with a high load capacity at low tyre pressure

KNK36	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U4203052OZK	16.0/70-20 14PR	TL	418	1075	154	A6	3750	51	3099	438
	U4242032OZK	9.00-24 10PR	TL	272	1094	124	B	1600	41	3285	499



KNK50

HARVESTER
TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U5263072OZK	23.1-26 18PR	TL	587	1605	162	A6	4750	37	4746	708
	U5303261OZK	18.4-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
	U5303361OZK	460/85-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
	U5304072OZK	23.1-30 18PR	TL	587	1715	160	A6	4500	36	5088	762
	U5342061OZK	18.4-34 16PR	TT	467	1650	159	A6	4375	45	4937	746
	U5387061OZK	20.8-38 16PR	TT	528	1840	162	A6	4750	39	5506	833
	U5387062OZK	20.8-38 16PR	TL	528	1840	162	A6	4750	39	5506	833



KNK22

FLOTATION
TYRES

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



KNK26

FLOTATION
TYRES

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction

KNK22	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				247	1017			2060	81		
KNK26	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				247	865			1650	58		
	U4162041OZK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
				247	865	128	A6	1800	67	2573	387



KNK25

FLOTATION
TYRES

- Resistance to stone and impacts thanks to its improved base
- General purpose trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



KNK27

FLOTATION
TYRES

- Balanced driving and excellent traction thanks to its special design
- Increased water and mud discharge thanks to surrounded gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature

KNK25	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				214	787	121	A8	1450	72	2353	355
KNK27	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				247	865	125	A6	1650	58	2573	387
	U4162141OZK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387
				247	865	128	A6	1800	67	2573	387



KNK28

FLOTATION
TYRES

- Convenient to use in asphalt and land thanks to tread pattern
- Durable sidewall with strong structure
- Soil holding feature with complex tread structure and channels
- Providing straight location to the ground thanks to tread design



KNK46

FLOTATION
TYRES

- Soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers
- The special tread compound resulting in exceptional cut and strong tread along with excellent wear resistance on all types of terrains

KNK28	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U4161141OZK	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355

KNK46	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U4173052OZK	500/50-17 14PR	TL	503	932	149	A8	3250	41	2771	416
	U4173072OZK	500/50-17 18PR	TL	503	932	157	A8	4125	70	2771	416



KNK42

FLOTATION
TYRES

- High load bearing capacity with strong structure and less soil compression with its wide base
- Anti-ground tread design



KNK48

FLOTATION
TYRES

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK42	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U4153442OZK	260/70-15.3 (10.0/75-15.3) 12PR	TL	268	753	126/114	A8	1700	52	2251	340
	U4153552OZK	300/80-15.3 (11.5/80-15.3) 14PR	TL	295	869	141/129	A8	2575	58	2579	386
	U4153052OZK	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394

KNK48	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U4151042OZK	10.0/75-15.3 (260/70-15.3) 12PR	TL	264	760	126/114	A8	1700	68	2271	343
	U4151052OZK	10.0/75-15.3 (260/70-15.3) 14PR	TL	264	760	130/118	A8	1900	80	2271	343
	U4152052OZK	11.5/80-15.3 (300/80-15.3) 14PR	TL	290	845	139/126	A8	2430	69	2511	377
	U4153152OZK	12.5/80-15.3 (320/80-15.3) 14PR	TL	307	889	142/129	A8	2650	62	2636	394
	U4163041OZK	10.5/65-16 (265/65-16) 12PR	TT	274	755	126/114	A8	1700	65	2262	343



KNK52

FLOTATION
TYRES

- High load bearing capacity with low section off road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern

KNK52	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U4151142OZK	10.0/75-15.3 12PR	TL	264	760	126/114	A8	1700	68	2271	343
	U4152152OZK	11.5/80-15.3 14PR	TL	290	845	139/126	A8	2430	69	2511	377
	U4153252OZK	12.5/80-15.3 14PR	TL	307	889	142/129	A8	2650	62	2636	394



KNK41

IMPLEMENT
TYRES

NEW
PATTERN

- Resistant to impacts and cuts thanks to the use of high quality compound
- Less soil compaction with large footprint
- Thanks to its special design, less tyre rolling resistance and fuel consumption

KNK41	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U4154122OZK	9.5L-15 SL 8PR	TL	240	770	112	B	1120	44	2418	350
	U4154222OZK	11L-15 SL 8PR	TL	280	775	113	B	1150	36	2434	352
	U4154342OZK	12.5L-15 SL 12PR	TL	315	825	127	B	1750	52	2591	372



KNK56

FLOTATION
TYRES

- Extra strong against stretching thanks to strong frame structure
- Flexibility and deep tread profile

KNK56	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U4153362OZK	12.5/80-15.3 16PR	TL	307	889	144/131	A8	2800	71	2636	394
	U4153772OZK	400/60-15.5 18PR	TL	404	874	151/139	A8	3450	90	2595	389
	U4221062OZK	550/60-22.5 16PR	TL	543	1244	167/163	A8/B	3750	41	3697	555



KNK42

IMPLEMENT
TYRES

- Low rolling resistance
- High comfort
- Preventing skidding thanks to its special pattern
- Low soil compact feature thanks to its wide base

KNK42	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U1124032OZK	10.0/80-12 10PR	TL	261	671	116	A8	1250	57	1993	299



KNK48

IMPLEMENT TYRES

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK48	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U1124132OZK	10.0/80-12 10PR	TL	264	710	116	A8	1250	57	2103	314



KNK52

IMPLEMENT TYRES

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Holding features for dry and wet grounds thanks to its pattern

KNK52	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U1121001OZK	5.00-12 4PR	TT	145	580	62	A6	265	32	1736	262
	U1123011OZK	7.00-12 6PR	TT	200	683	83	A6	485	36	2027	304
	U1131011OZK	6.50/80-13 6PR	TT	170	640	82	A6	475	52	1913	289



KNK50

IMPLEMENT TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U1152011OZK	6.50/80-15 6PR	TT	163	663	96	A6	710	52	1994	303



KNK54

IMPLEMENT TYRES

- High traction ability thanks to its angle blocks
- Easy movement ability thanks to anti-ground base design
- Preventing clusters in the center and sidewalls during movement of tractor thanks to its open design in center
- Facilitating releasing of muds thanks to windowed blocks

KNK54	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U1122011OZK	6.50/80-12 6PR	TT	163	588	80	A6	450	52	1758	266



KNK140

IMPLEMENT
TYRES

- Proper use in lands and gardens
- Strong and robust structure
- Preventing skidding thanks to its special pattern
- Long lasting and economic use
- Optimum performance with small-type gardening and agriculture vehicles

KNK140	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U1151011OZK	5.00-15 6PR	TT	145	655	76	A6	400	50	1972	300



FRS40

FORESTRY
TYRES

- Specially designed for forestry application
- Special tread and sidewall compound provides maximum tyre life against cut and crack resistance
- Excellent puncture resistance thanks to strong breaker construction shoulder to shoulder
- Lower lug angle providing excellent grip and self cleaning properties for logging operations
- Tie-bar on the central lugs protects the tyre against deep impacts

FRS40	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U5262262OZK	18.4-26 16PR	TL	467	1461	153	A6	3650	44	4338	650



THE ART OF
SATISFYING CUSTOMERS

Move forward your work with Özka's on-time delivery and fast solutions.

INDUSTRIAL, EM, OTR TYRES

ORMER X30	ORMER X33	STEXOR20	STEXOR40
OR71	KNK44	KNK65	KNK66
IND80	KNK12	IND85	IND88
KNK70	KNK72	KNK74	KNK77
KNK88	KNK40	SOLIFT	





NEW
PATTERN



ORMER X30

ALL STEEL RADIAL
TYRES

- All-Steel tyre specially designed for articulated dump trucks & wheel loaders operating in severe conditions.
- Robust casing with steel belt provides excellent durability and ground stability even with higher load carrying capacity.
- Multi-stepped rigid block tread design and special tread compound offers superior traction & self-cleaning properties along with increased resistance to tread cuts and external damages.

ORMER X30	Product Code	Tyre Size	Star Rating	TT/TL	Overall Diameter (mm)	Section Width (mm)	Static Loaded Radius (mm)	Dynamic Rolling Circumference (mm)	Rec. Rim (inch)	TRA Code	LI/SS	Tyre Load Capacity (kg)	Tyre Pressure At Max. Load (psi)
	*URC025205702OZK	20.5 R25	**	TL	1493	525	664	4456	17.00/2.0 - 25	E3	177/B	7300	76
										L3	193/A2	11500	94
	*URC025235702OZK	23.5 R25	**	TL	1624	610	727	4874	19.50/2.5 - 25	E3	185/B	9250	76
										L3	201/A2	14500	94

NEW
PATTERN



STEXOR20

ALL STEEL
RADIAL TYRES

- All-Steel tyre specially designed for grader application offering stable and steady performance on uneven terrain.
- Exclusive non-directional tread pattern provides excellent traction along with significant self-cleaning properties.
- Optimised tread compound for lower heat generation and higher tyre life.

STEXOR20	Product Code	Tyre Size	Star Rating	TT/TL	Overall Diameter (mm)	Section Width (mm)	Static Loaded Radius (mm)	Dynamic Rolling Circumference (mm)	Rec. Rim (inch)	TRA Code	LI/SS	Tyre Load Capacity (kg)	Tyre Pressure At Max. Load (psi)
	*URC024140612OZK	14.00 R24	*	TL	1346	360	624	4110	9.00GR	G2	153/A8	3650	54

NEW
PATTERN



ORMER X33

ALL STEEL RADIAL
TYRES

- All-Steel tyre specially designed for articulated dump trucks & wheel loaders operating in severe conditions.
- Robust casing with steel belt provides excellent durability and ground stability even with higher load carrying capacity.
- Multi-stepped rigid block tread design and special tread compound offers superior traction & self-cleaning properties along with increased resistance to tread cuts and external damages.

ORMER X33	Product Code	Tyre Size	Star Rating	TT/TL	Overall Diameter (mm)	Section Width (mm)	Static Loaded Radius (mm)	Dynamic Rolling Circumference (mm)	Rec. Rim (inch)	TRA Code	LI/SI	Tyre Load Capacity (kg)	Tyre Pressure At Max. Load (psi)
	*URC025265702OZK	26.5 R25	**	TL	1745	688	781	5227	22.00/3.0 - 25	E3	193/B	11500	76
										L3	209/A2	18500	94

NEW
PATTERN



STEXOR40

RADIAL EM
TYRES

STEEL
BELTED

- High traction thanks to its special tread design
- Exceptional wear resistance
- High load capacity thanks to its steel belts
- Balanced and comfortable ride
- Superior durability

STEXOR40	Tyre Info					Rim	Inflated Unloaded Dimension		Static Loaded Radius (mm)	Rolling Circumference (mm)	Inflation Pressure (psi)	Load Capacity (kg) *				
	Product Code	Tyre Size	TT/TL	LI/SS	TRA Code	Rec. Rim (inch)	Overall Diameter (mm)	Section Width (mm)	480	3194	58	10 km/h	25 km/h	30 km/h	40 km/h **	50 km/h **
	*UR7020400602OZK	400/70 R20	TL	149 A8/B	R-4	13	1068	404				4065	3610	3480	3250	3250
	*UR7020405602OZK	405/70 R20	TL	149 A8/B	R-4	13	1070	414				4065	3610	3480	3250	3250
	*UR7024460602OZK	460/70 R24 (17.5LR24)	TL	159 A8/B	R-4	DW15L	1251	453	562	3740	58	5470	4855	4680	4375	4375



OR71

RADIAL EM
TYRES

- High traction and comfort
- Longer service life
- Comfortable drive due to flexible sidewall structure
- Strong carcass structure
- Resistance to fatigue due to wide shoulder and blocks
- Strong tread compound for cut-resistance
- High performance due to wide base track
- Mud repellent feature due to specially designed tread pattern

70 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm				kg	psi		
				mm	mm				kg	psi		
	UR7024460712OZK	460/70 R24	TL	455	1255	159/159	A8/B	R-4	4375/4375	58	3740	563
	UR7024500712OZK	500/70 R24	TL	503	1310	164/164	A8/B	R-4	5000	58	4113	592
80 SERIES	UR8024440712OZK	440/80 R24	TL	450	1320	154/154	A8/B	R-4	3750/3750	46	3924	589
	UR8028440712OZK	440/80 R28	TL	450	1420	156/156	A8/B	R-4	4000/4000	46	4238	639



KNK65

EM / INDUSTRIAL
TYRES

- Long wear-life
- Cracking/fatigue resistance at treads
- Maximum traction
- Increased sidewall protection

KNK65	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U6161042OZK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
	U6162052OZK	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380



KNK44

EM / INDUSTRIAL
TYRES

- Resistance to stone cuts, cracks and breaks
- Long wear-life

KNK44	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U6202061OZK	10.00-20 16PR	TT	283	1084	146 / 143	B	3000	109	3225	484
	U6202062OZK	10.00-20 16PR	TL	283	1084	146 / 143	B	3000	109	3225	484



KNK66

EM / INDUSTRIAL
TYRES

- High traction and comfort
- Designed compatible with scrap operations and recycling process
- Excellent maneuverability at high tonnage due to reinforced shoulder blocks
- Comfortable drive due to flexible sidewall structure
- Reinforced tread structure
- Longer life due to improved tread structure
- Wear resistance due to special tread combination

KNK66	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U6161142OZK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352
	U6162152OZK	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380
	U6182052OZK	12.5/80-18 14PR	TL	305	983	146	A8	3000	62	2923	439



IND80

EM / INDUSTRIAL
TYRES

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life

IND80

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm				kg	psi		
U6161242OZK	10-16.5 12PR	TL	256	793	138	A3	R-4	2360	84	2374	359
U6162252OZK	12-16.5 14PR	TL	297	858	148	A3	R-4	3150	90	2558	385
U6181042OZK	10.5/80-18 12PR	TL	271	892	135	A8	R-4	2180	62	2666	403
U6182152OZK	12.5/80-18 14PR	TL	285	955	146	A8	R-4	3000	62	2844	428
U6207062OZK	16.0/70-20 16PR	TL	385	1091	166	A2	R-4	5300	65	3244	487
U6207162OZK	405/70-20 16PR	TL	385	1091	166	A2	R-4	5300	65	3244	487
U6243062OZK	15.5/80-24 16PR	TL	412	1269	162	A8	R-4	4750	72	3780	569
U6245062OZK	16.0/70-24 16PR	TL	418	1200	169	A2	R-4	5800	65	3584	541
U6245162OZK	405/70-24 16PR	TL	418	1200	169	A2	R-4	5800	65	3584	541
U6246062OZK	16.9-24 16PR	TL	429	1310	154	A8	R-4	3750	46	3895	585
U6246162OZK	440/80-24 16PR	TL	429	1310	154	A8	R-4	3750	46	3895	585
U6247052OZK	17.5L-24 14PR	TL	475	1277	154	A8	R-4	3750	46	3802	572
U6248052OZK	19.5L-24 14PR	TL	495	1314	154	A8	R-4	3750	38	3907	587
U6251052OZK	15.5-25 14PR	TL	400	1286	173	A2	R-4	6500	68	3836	578
U6261052OZK	18.4-26 14PR	TL	467	1425	160	A8	R-4	4500	42	4237	636
U6281052OZK	16.9-28 14PR	TL	429	1410	156	A8	R-4	4000	43	4210	635
U6281152OZK	440/80-28 14PR	TL	429	1410	156	A8	R-4	4000	43	4210	635
U6301062OZK	16.9-30 16PR	TL	418	1466	156	A8	R-4	4000	47	4384	663

ÖZKA



KNK12

EM / INDUSTRIAL
TYRES

- Pattern feature designed for non-road and highway use
- Excellent maneuverability due to nondirectional use feature

KNK12

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U6204152OZK	12.5-20 14PR	TL	325	1040	137	A8	2300	51	3100	467

INDUSTRIAL, EM, OTR TYRES



IND85

EM / INDUSTRIAL
TYRES

- High traction and comfort
- Resistance to any kind of impacts with its tread structure
- Comfortable drive due to flexible sidewall structure
- Reinforced bead design
- Reinforced sidewall structure
- Excellent maneuverability at high tonnage due to flexible sidewall structure
- Longer life with its reinforced tread pattern
- Strong tread compound against punctures and impacts
- Longer life due to increased tread number and improved tread depth

IND85

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm				kg	psi		
U6182252OZK	12.5/80-18 14PR	TL	304	965	146	A8	R-4	3000	62	2872	432



IND88

EM / INDUSTRIAL
TYRES

- Robust industrial pattern with higher resistance to puncture and tread wear
- Higher traction with wide pattern design at the center lug
- Reinforced bead design

IND88	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm				kg	psi		
	U6182352OZK	12.5/80-18 14PR	TL	308	987	146	A8	R-4	3000	62	2934	441
	U6183052OZK	340/80-18 14PR	TL	343	1001	146	A8	R-4	3000	62	2974	446
	U6207262OZK	16.0/70-20 16PR	TL	385	1091	166	A2	R-4	5300	65	3244	487
	U6206052OZK	14.5-20 14PR	TL	355	1095	143	D	R-4	2725	51	3256	489



KNK72

EM / INDUSTRIAL
TYRES

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life

KNK72	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm				kg	psi		
	U6241062OZK	13.00-24 16PR	TL	335	1280	151	A8	G2	3450	58	3811	573
	U6242062OZK	14.00-24 16PR	TL	382	1354	153	A8	G2	3650	54	4020	603



KNK70

EM / INDUSTRIAL
TYRES

- Strong and durable thanks to excellent design
- Its compound resistant to wear, and its blocks resistant to heavy conditions with long maintenance periods
- Minimizing stretching at base with its strong blocks in its center

KNK70	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm				kg	psi		
	U6242002OZK	14.00-24 24PR	TL	375	1360	186	A2	E - 3 L - 3	9500	123	4037	605
	U6242042OZK	14.00-24 32PR	TL	375	1360	190	A2	E - 3 L - 3	10600	145	4037	605
	U6251062OZK	15.5-25 16PR	TL	384	1261	175	A2	E - 3 L - 3	6900	72	3765	568
	U6252082OZK	17.5-25 20PR	TL	455	1371	181	A2	E - 3 L - 3	8250	83	4076	612
	U6254002OZK	20.5-25 24PR	TL	531	1527	189	A2	E - 3 L - 3	10300	76	4517	674
	U6255002OZK	23.5-25 24PR	TL	604	1625	196	A2	E - 3 L - 3	12500	68	4794	714
	U6256022OZK	26.5-25 28PR	TL	702	1785	203	A2	E - 4 L - 4	15500	68	5246	778
	U6256042OZK	26.5-25 32PR	TL	702	1785	206	A2	E - 4 L - 4	17000	79	5246	778
	U6257042OZK	29.5-25 32PR	TL	758	1923	210	A2	E - 4 L - 4	19000	72	5637	833



KNK74

EM / INDUSTRIAL
TYRES

- Strong structure
- Increased tread depth and tread pattern providing optimum traction in muddy fields

KNK74	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm				kg	psi		
	U6244062OZK	16.00-24 16PR	TL	432	1493	160	A8	G2	4500	47	4413	658



KNK77

COMPACTOR
TYRES

- Wide shoulder and base width, blocked design
- High traction ability
- Anti-wear future thanks to its pattern appropriate for agricultural, industrial and off road use
- Consisting durable blocks
- Easy use in soft grounds
- Balanced driving and easy control thanks to wide shoulder and blocks

KNK77	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U6262052OZK	23.1-26 14PR	TL	587	1580	166	A8	5300	33	4675	698



KNK40

FORKLIFT
TYRES

- High kilometer performance thanks to its special structure
- Comfortable driving thanks to excellent traction
- Maximum traction
- Long wear-life
- Resistance to any kind of impacts

KNK40	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U6091041OZK	6.00-9 12PR	TT	165	544	121	A5	1450	145	1610	240
	U6101041OZK	6.50-10 12PR	TT	181	592	125	A5	1650	110	1754	262
	U6121051OZK	7.00-12 14PR	TT	195	674	134	A5	2120	110	2001	300
	U6151051OZK	8.15-15 (28X9-15) 14PR	TT	220	710	146	A5	3000	145	2127	322
	U6152071OZK	8.25-15 18PR	TT	240	840	153	A5	3650	145	2495	374



KNK88

COMPACTOR
TYRES

- Compressing ability for asphalt with its plane surfaced tread pattern
- Stable operation feature thanks to strong frame at sidewalls

KNK88	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U6201041OZK	9.00-20 12PR	TT	256	1002	157	A2	4125	94	2993	452
	U6203061OZK	11.00-20 16PR	TT	290	1040	168	A2	5600	107	3100	467



SOLIFT

SOLID FORKLIFT
TYRES

NEW
PATTERN

- High traction
- High resistance against punctures and tears
- Special mixture that protects the integral structure of the tyre
- Tread structure designed for hard working conditions
- Longer service-life
- Comfortable drive in operation

SOLIFT	Tyre Information				Technical Information					
	Product Code	Tyre Size	Recommended Rim	Bead Type	Overall Diameter	Section Width	Forklift (Up to 25km/h)		Load Index	Speed Index
							Load Wheel	Steer Wheel		
	mm	mm	kg	kg	LI	SI				
	*U7081010OZK	18x7-8	4.33R-8	Quick Lip	452	160	2145	1650	125	A5
*U7101010OZK	200/50-10	6.50F-10	Quick Lip	457	193	2470	1900	130	A5	
*U7102010OZK	23x9-10 (225/75-10)	6.50F-10	Quick Lip	583	198	3445	2650	142	A5	
*U7151010OZK	8.15-15 (28x9-15)	7.0-15	Quick Lip	689	212	3445	2650	142	A5	
*U7103010OZK	6.50-10	5.00F - 10	Quick Lip	576	165	2340	1800	128	A5	
*U7091010OZK	6.00-9	4.00E - 9	Quick Lip	528	150	1885	1450	121	A5	
*U7121010OZK	7.00-12	5.00S - 12	Quick Lip	657	175	2920	2240	136	A5	

THE ART OF CHALLENGING CONDITIONS

Struggle against hard conditions with Özka tyres,
characterized by robust structure and exceptional impact resistance.

ÖZKA



LCV TYRES

KNK20

KNK24

KNK25

KNK126







KNK20

LIGHT TRUCK & MINIBUS
TYRES

- Strong frame structure and high wear resistance
- Balanced driving thanks to its corrugated pattern
- Increased water discharge thanks to its corrugated gutters
- Increased road bend ability and excellent traction
- Retreadability feature



KNK25

LIGHT TRUCK & MINIBUS
TYRES

- Optimum performance in traction and brakes due to special deep tread pattern
- Strong frame structure and high wear resistance
- Anti-stone increased water and mud resistance thanks to its surrounding gutters
- Retreadability feature

KNK20	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U2141021OZK	6.50-14 8PR	TT	171	647	97/95	L	730/690*	65	1918	287
	U2141031OZK	6.50-14 10PR	TT	171	647	100/98	L	800/750*	72	1918	287
	U2151031OZK	7.50-15 10PR	TT	235	789	114/112	L	1180/1120*	76	2318	344
	U2161031OZK	6.50-16 10PR	TT	176	748	108/107	L	1000/975*	73	2216	331
	U2162031OZK	7.00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345
	U2163041OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	335

KNK25	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U2163241OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355



KNK24

LIGHT TRUCK & MINIBUS
TYRES

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



KNK126

LIGHT TRUCK & MINIBUS
TYRES

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature

KNK24	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U2163141OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355

KNK126	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
				mm	mm			kg	psi		
	U2161131OZK	6.50-16 10PR	TT	176	748	108/107	L	1000/975*	73	2216	331
	U2162131OZK	7.00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345
	U2151131OZK	7.50-15 10PR	TT	235	786	114/112	L	1180/1120*	76	2310	342
	U2163341OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355

THE ART OF UNDERSTANDING THE GROUND

Experience Özka tyre performance that avoids soil compaction and holding mud thanks to its deep and wide tread structure.



RIM DIAMETER	EQUIVALENCE TABLE OF INTERCHANGEABILITY FOR RADIAL AND DIAGONAL TYRES								
16	6.00 # 16	210/80 # 16	240/70 # 16	260/65 # 16					
16	6.50 # 16	260/70 # 16	280/65 # 16						
16	7.50 # 16	210/95 # 16	250/80 # 16	280/70 # 16	300/65 # 16	320/65 # 16			
16	8.25 # 16	300/70 # 16							
18	7.50 # 18	210/95 # 18	250/80 # 18	280/70 # 18	300/65 # 18	320/65 # 18			
18	10.5/80 # 18	300/70 # 18	340/65 # 18						
20	7.50 # 20	280/70 # 20							
20	9.5 # 20	8.00 # 20	250/85 # 20	260/80 # 20	300/70 # 20	340/65 # 20			
20	11.2 # 20	280/85 # 20	320/70 # 20						
20	12.4 # 20	320/85 # 20	340/80 # 20	340/75 # 20	360/70 # 20	420/65 # 20			
20	13.6 # 20	14.9L # 20	380/75 # 20	400/70 # 20	380/70 # 20	440/65 # 20			
20	12.4 # 28	320/85 # 28	360/70 # 28	420/65 # 28					
24	9.5 # 24	240/85 # 24	250/85 # 24	300/70 # 24	360/60 # 24				
24	11.2 # 24	280/85 # 24	320/70 # 24						
24	12.4 # 24	320/85 # 24	360/70 # 24	420/65 # 24					
24	13.6 # 24	340/85 # 24	380/75 # 24	380/70 # 24	400/70 # 24	440/65 # 24			
24	14.9 # 24	380/85 # 24	420/70 # 24	460/70 # 24	480/65 # 24				
24	16.9 # 24	420/85 # 24	480/70 # 24	480/75 # 24	540/65 # 24				
26	16.9 # 26	480/70 # 26	540/65 # 26						
26	18.4 # 26	460/85 # 26	520/70 # 26	580/70 # 26	750/50 # 26				
26	23.1 # 26	28 L # 26	620/75 # 26	650/70 # 26	750/65 # 26				
28	9.5 # 28	240/85 # 28	250/85 # 28	340/65 # 28					
28	11.2 # 28	280/85 # 28	320/70 # 28						
28	13.6 # 28	340/85 # 28	380/70 # 28	440/65 # 28	480/60 # 28				
28	14.9 # 28	380/85 # 28	420/70 # 28	420/75 # 28	480/65 # 28	520/60 # 28			
28	16.9 # 28	420/85 # 28	480/70 # 28	480/75 # 28	540/65 # 28	600/60 # 28			
28	18.4 # 28	540/75 # 28	600/65 # 28						
30	14.9 # 30	380/85 # 30	420/70 # 30						
30	16.9 # 30	420/90 # 30	420/85 # 30	480/70 # 30	480/75 # 30	540/65 # 30	600/60 # 30		
30	18.4 # 30	21L # 30	460/85 # 30	520/70 # 30	600/65 # 30	710/55 # 30			
30	23.1 # 30	620/75 # 30	650/70 # 30	710/65 # 30					
32	8.3 # 32	210/95 # 32							
32	9.5 # 32	230/95 # 32	270/80 # 32	270/75 # 32					
32	12.4 # 32	320/85 # 32							
32	24.5 # 32	650/75 # 32	680/70 # 32	800/60 # 32					
32	30.5 L # 32	710/75 # 32	680/75 # 32	800/65 # 32	850/60 # 32	900/55 # 32	1050/50 # 32		
34	14.9 # 34	380/85 # 34							
34	16.9 # 34	420/85 # 34	480/70 # 34	480/75 # 34	500/70 # 34	540/65 # 34	600/60 # 34		
34	18.4 # 34	460/85 # 34	520/70 # 34	520/75 # 34	540/70 # 34	600/65 # 34	710/55 # 34	800/50 # 34	
34	20.8 # 34	23.1 # 34	620/75 # 34	710/70 # 34	650/65 # 34	710/60 # 34			
36	8.3 # 36	210/95 # 36							
36	12.4 # 36	320/85 # 36							
36	13.6 # 36	340/85 # 36							
36	9.5 # 36	230/95 # 36	270/80 # 36						
36	11.2 # 36	270/95 # 36							
38	9.5 # 38	230/95 # 38							
38	11.2 # 38	270/95 # 38	290/90 # 38						
38	12.4 # 38	320/85 # 38							
38	13.6 # 38	15.5 # 38	340/85 # 38	380/80 # 38	400/75 # 38				
38	14.9 # 38	380/85 # 38							
38	16.9 # 38	420/85 # 38	480/70 # 38	480/75 # 38	540/65 # 38	600/60 # 38			
38	18.4 # 38	460/85 # 38	520/70 # 38	520/75 # 38	600/65 # 38	650/60 # 38			
38	20.8 # 38	520/85 # 38	580/70 # 38	620/70 # 38	650/65 # 38	710/65 # 38	710/60 # 38	850/50 # 38	
42	9.5 # 42	230/95 # 42							
42	11.2 # 42	270/95 # 42	300/85 # 42						
42	12.4 # 42	300/95 # 42							
42	18.4 # 42	460/85 # 42	480/80 # 42	600/65 # 42					
42	20.8 # 42	520/85 # 42	580/70 # 42	620/70 # 42	650/65 # 42	750/60 # 42	710/60 # 42	850/55 # 42	900/50 # 42
44	8.3 # 44	210/95 # 44							
44	9.5 # 44	230/95 # 44							
46	12.4 # 46	270/95 # 46	300/95 # 46	320/90 # 46	340/85 # 46				
46	20.8 # 46	520/85 # 46	650/65 # 46	620/70 # 46					
48	9.5 # 48	230/95 # 48							
48	13.6 # 48	340/85 # 48							

"#" Symbol can be replaced with "R" for Radial, "-" or "D" for Diagonal Tyres

Notes

[illegible]

Notes

[illegible]

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



HEADQUARTER/FACTORY

Mahmutpaşa Mah. Kanalyolu Cad. No:129 / 41140

Başıskele / Kocaeli, TÜRKİYE

Tel: +90 262 349 50 00

info@ozkalastik.com





SALES OFFICE/WAREHOUSE

Yaylacık Mah. Metin Sok. No:1

Başıskele / Kocaeli, TÜRKİYE

Tel: +90 262 349 50 00

info@ozkalastik.com



ozkatyres.com

