

PRODUCT CATALOGUE



THE ART OF
MOVING FORWARD



INDEX

ABOUT US	4
TYRE READING INFORMATION	19
AGRICULTURAL TYRES	22 - 52
VF Radial Tractor Tyres	26
Radial Tractor Tyres	27 - 31
Radial Flotation Tyres	31
Front Tractor Tyres	36 - 38
Rear Tractor Tyres	39- 41
Irrigation Tyres	42
Harvester Tyres	42 - 43
Flotation Tyres	44 - 48
Implement Tyres	49 - 52
Forestry Tyres	52
INDUSTRIAL, EM, OTR TYRES	54 - 67
All Steel Radial Tyres	58
Radial EM Tyres	59 - 60
EM / Industrial Tyres	60 - 65
Compactor Tyres	66
Forklift Tyres	67
Solid Forklift Tyres	67
LCV TYRES	70 - 75
Light Truck & Minibus Tyres	74 - 75
CORRESPONDING TYRE SIZE	78





Built on Expertise Since 1991

Since 1991, we have been on a journey to achieve excellence in the global market and stand out with our expertise. Advancing with a vision to reach leadership and become a global brand, we are committed to making a difference.



The Art of Being a World Brand

With a network of over 400 authorized dealerships in Türkiye and reaching 90 countries across 6 continents worldwide, we are steadily growing to become a globally recognized brand with our high-quality products.



Comprehensive Product Portfolio

As Özka Tyres, we utilize advanced production systems to create a diverse range of products. Our radial agricultural tyre selection includes options for tractors, harvesters, and trailers, while the conventional agricultural tyre category features products for tractors, trailers, harvesters, and garden/field use. In the industrial tyre category, we offer options suitable for excavation, road construction machinery, and forklifts. In addition, our newly introduced solid forklift tyres, VF radial tractor tyres, all-steel radial tyres, and steel-belted radial EM tyres. Additionally, we manufacture tyres for light commercial vehicles, such as pick-up/minibus tyres. Our solutions, crafted with expertise, address the varied needs of the industry.



The Art of Innovation

Our R&D team develops products based on our expertise, ensuring the quality and safety of our products from raw material input to post-shipment control. We conduct our business with innovative solutions and certify our quality with ISO9001, ISO14001, ISO45001, and ISO27001 management system certificates.



Customer-Centric Approach

With a customer-centric approach, on-time delivery, and quick solutions, we offer robust, reliable, and compliant tyres that meet national and international standards. Managing all processes with expertise, we efficiently handle our order processes in a corporate infrastructure that works seamlessly through renewed CRM, B2B, and SAP systems. Our post-sales support and technical service teams provide swift solutions to inquiries, suggestions, and complaints.



The Art of Moving Forward

We consider our young, dynamic, and experienced team of 1500 employees as the foundation for sustainable growth. Actively participating in activities such as corporate training, seminars, and exhibitions for the development of human resources, we consistently strive for improvement goals.

THE ART OF BUILDING TRUST



OUR CERTIFICATES





THE ART OF MOVING FORWARD

We're not following the path everyone else takes. We draw our own path to achieve perfection and make a difference with our expertise.

Just like an artist meticulously crafts every detail, giving meaning to their work, we approach our tyres with an artistic perspective. And by combining this approach with our superior manufacturing technologies, we create design masterpieces.

This catalogue is an interpretation of ÖZKA's expertise through an artistic perspective.

THE ART OF BEING A WORLD BRAND


Discover Özka's expertise reaching 6 continents and 90 countries.



ÖZKA

THE ART OF LEADERSHIP

Elevate your business with tailored solutions by partnering with Özka, a leading manufacturer of agricultural and industrial tyres.

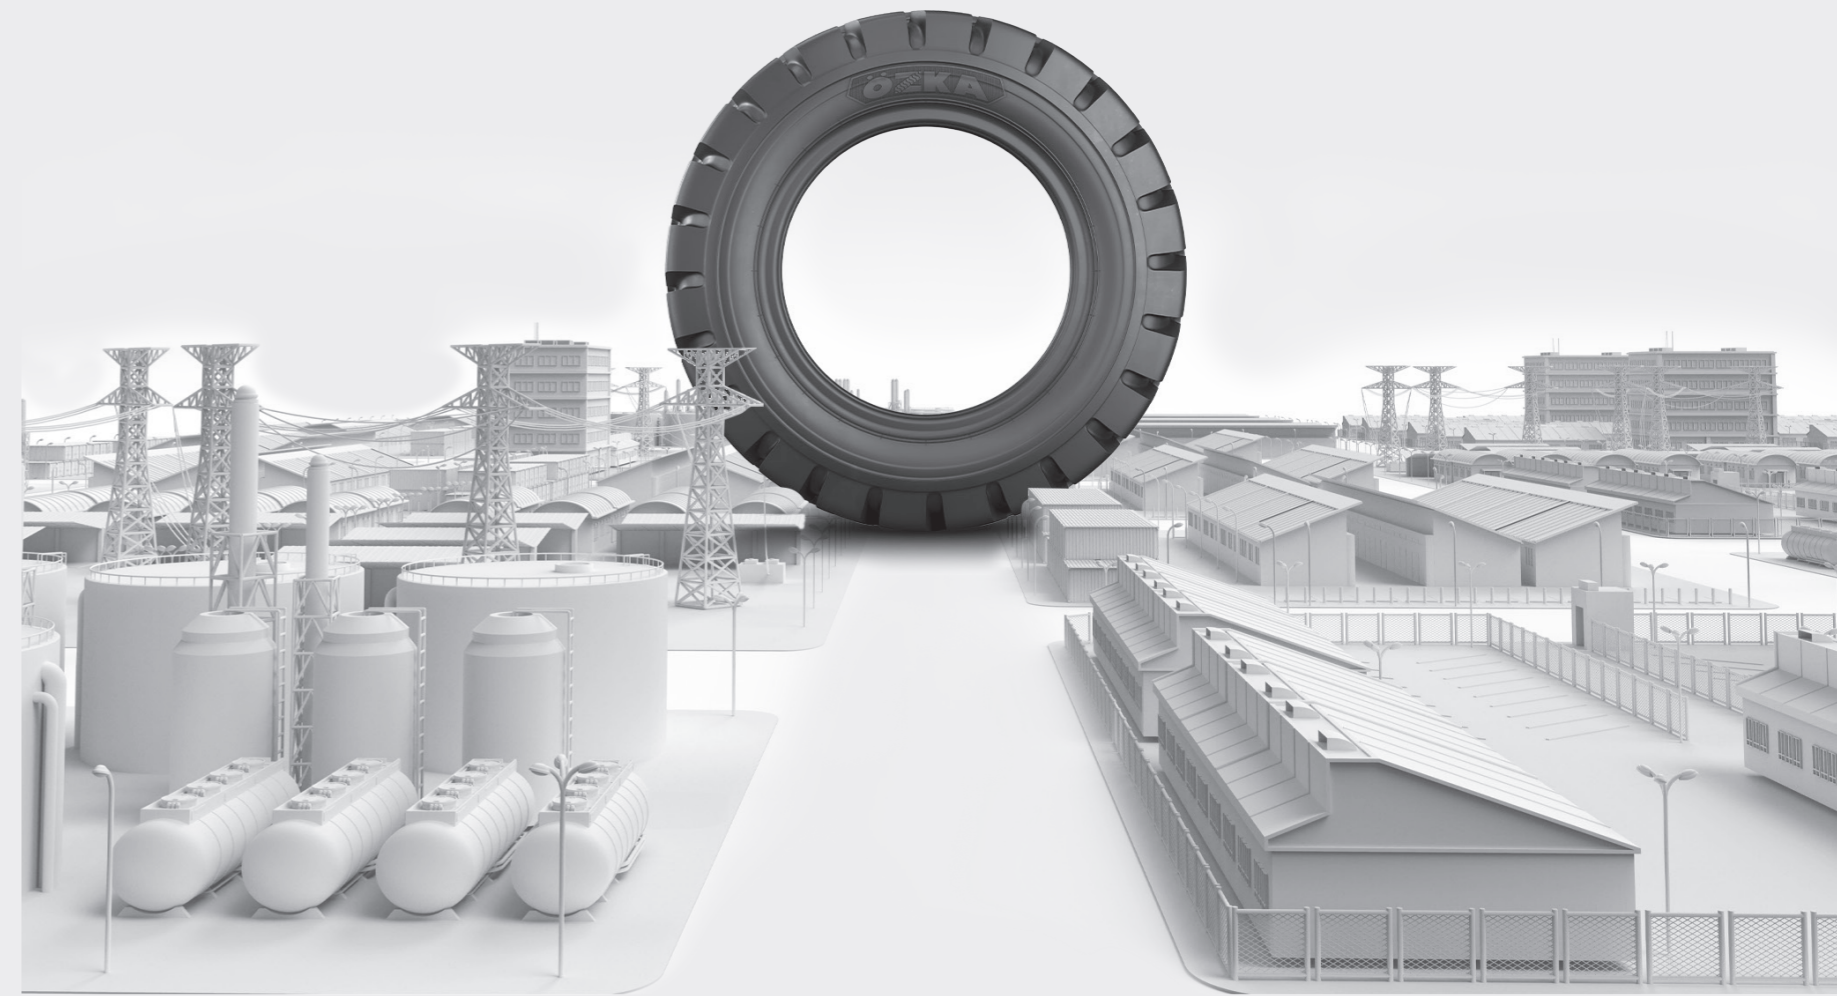

THE ART OF CREATING TRUST

Explore the assurance of reliability and excellence
through Özka's international certifications.



THE ART OF UNDERSTANDING REAL NEEDS

Explore Özka's wide range of products designed to fulfill diverse customer requirements.



THE ART OF HIGH PERFORMANCE

Choose from a range of radial and conventional tyres that suit you best and meet Özka's superior performance and power.

ÖZKA





EXPERTISE IN ANY DETAILS



PRODUCT RANGE

RADIAL TRACTOR TYRES



FLEXTURE **AGROLOX** **AGRO10** **AGRO11**

RADIAL FLOTATION TYRES



AGRIGOR20

IMPLEMENT TYRES



KNK41 **KNK42** **KNK48** **KNK50** **KNK52** **KNK54** **KNK140**

FORESTRY TYRES



FRS40

FRONT TRACTOR TYRES



KNK30 **KNK32** **KNK33** **KNK35** **KNK50**

REAR TRACTOR TYRES



KNK50 **KNK53**

ALL STEEL RADIAL TYRES



ORMER X30

RADIAL EM TYRES



STEXOR40 **OR71**

EM / INDUSTRIAL TYRES



KNK44 **KNK65** **KNK66** **IND80** **KNK12** **IND85**

IRRIGATION TYRES



KNK55

HARVESTER TYRES



KNK36 **KNK48** **KNK50**

FLOTATION TYRES



KNK22 **KNK25** **KNK26**

EM / INDUSTRIAL TYRES



IND88 **KNK70** **KNK72** **KNK74**

COMPACTOR TYRES



KNK77 **KNK88**

FLOTATION TYRES



KNK27 **KNK28** **KNK42** **KNK46** **KNK48** **KNK52** **KNK56**

FORKLIFT TYRES



KNK40

SOLID FORKLIFT TYRES



SOLIFT

LIGHT TRUCK & MINIBUS TYRES



KNK20 **KNK24** **KNK25** **KNK126**

AGRICULTURAL TYRES

FLEXTURE	AGROLOX	AGRO10	AGRO11
AGRIGOR20	KNK30	KNK32	KNK33
KNK35	KNK50	KNK53	KNK55
KNK36	KNK48	KNK22	KNK25
KNK26	KNK27	KNK28	KNK42
KNK46	KNK52	KNK56	KNK41
KNK54	KNK140	FRS40	







FLEXTURE

VF RADIAL TRACTOR TYRES

NEW PATTERN

- Significantly increased flexibility thanks to its advanced technology.
- Enhanced load-carrying capacity at lower pressure, preventing soil compaction.
- Greater convenience and comfort by removing the need to adjust tyre pressure between roads and fields that helps saving time.



AGROLOX

RADIAL TRACTOR TYRES

- Increased traction both on land and on the road with its renewed pattern and double-angle tread structure
- Comfortable driving both in the field and on the road
- Extra protection in the tread area against fatigue and cracking thanks to the increased lug block
- Increased productivity with special pattern design
- High resistance against punctures and tears thanks to 3-layers bar structure

70 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	* UR7038800402OZK	VF 800/70 R38	TL	804	2085	184/181	D/E	9000/8250	23	6547	942
75 SERIES	* UR7542710402OZK	VF 710/75 R42	TL	705	2133	181/178	D/E	8250/7500	23	6698	971
90 SERIES	* UR9050380402OZK	VF 380/90 R50	TL	385	1955	175	D	6900	64	6140	920
	* UR9046380402OZK	VF 380/90 R46	TL	383	1852	173	D	6500	64	5815	875

60 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	UR6032900302OZK	900/60 R32	TL	905	1870	182/185	D/A8	8500/9250	58	5543	829
65 SERIES	UR6518320302OZK	320/65 R18	TL	319	873	109/109	A8/B	1030/1030	23	2612	395
	UR6520440302OZK	440/65 R20	TL	441	1080	138/141	D/A8	2360/2580	35	3213	483
	UR6524440302OZK	440/65 R24	TL	441	1182	135/138	D/A8	2180/2385	35	3534	534
	UR6528440302OZK	440/65 R28	TL	445	1285	131/134	D/A8	1950/2120	35	3857	585
	UR6524480302OZK	480/65 R24	TL	479	1234	133/136	D/A8	2060/2255	23	3681	555
	UR6528480302OZK	480/65 R28	TL	479	1335	142/145	D/A8	2650/2900	35	3998	605
	UR6528540302OZK	540/65 R28	TL	550	1413	149/152	D/A8	3250/3560	35	4219	636
	UR6530540302OZK	540/65 R30	TL	550	1470	150/153	D/A8	3350/3650	35	4396	664
	UR6534540302OZK	540/65 R34	TL	550	1575	152/155	D/A8	3550/3875	35	4725	716
	UR6538540302OZK	540/65 R38	TL	550	1675	153/156	D/A8	3650/4000	35	5039	767
	UR6528600302OZK	600/65 R28	TL	601	1491	154/157	D/A8	3750/4105	35	4407	657
	UR6538600302OZK	600/65 R38	TL	601	1745	159/162	D/A8	4375/4750	35	5237	795
	*UR6534650302OZK	650/65 R34	TL	601	1644	161/164	D/A8	4620/4500	35	5162	752
	UR6538650302OZK	650/65 R38	TL	650	1820	163/166	D/A8	4875/5300	35	5449	825
	UR6542650302OZK	650/65 R42	TL	650	1913	165/168	D/A8	5150/5600	35	5744	872



70 SERIES	Product Code	Tyre Size	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	*UR7016200302OZK	200/70 R16	TL	197	686	94/94	A8/B	670/670	35	2154	317
	*UR7020260302OZK	260/70 R20	TL	258	872	113/113	A8/B	1150/1150	35	2738	403
	UR7016280302OZK	280/70 R16	TL	282	798	112/112	A8/B	1120/1120	35	2506	345
	UR7018280302OZK	280/70 R18	TL	282	849	114/114	A8/B	1180/1180	35	2666	366
	UR7020280302OZK	280/70 R20	TL	282	900	116/116	A8/B	1250/1250	35	2826	387
	UR7020300302OZK	300/70 R20	TL	295	952	120/117	A8/B	1400/1285	35	2989	410
	*UR7020320302OZK	320/70 R20	TL	319	982	113/113	A8/B	2535/2535	23	3083	448
	UR7028320302OZK	320/70 R28	TL	319	1189	119/119	A8/B	1360/1360	23	3585	547
	UR7020360302OZK	360/70 R20	TL	357	1042	129/129	A8/B	1850/1850	35	3272	452
	*UR7024360302OZK	360/70 R24	TL	357	1152	122/119	A8/B	1500/1360	23	3617	527
	UR7024380302OZK	380/70 R24	TL	380	1190	125/128	D/A8	1650/1800	23	3556	537
	UR7028380302OZK	380/70 R28	TL	380	1293	127/130	D/A8	1750/1910	23	3879	588
	UR7024420302OZK	420/70 R24	TL	418	1248	130/133	D/A8	1900/2080	23	3720	560
	UR7028420302OZK	420/70 R28	TL	418	1351	133/136	D/A8	2060/2250	23	4043	612
	UR7028480302OZK	480/70 R28	TL	480	1425	140/143	D/A8	2500/2730	23	4253	641
	UR7030480302OZK	480/70 R30	TL	479	1478	141/138	A8/B	2575/2360	23	4641	628
	UR7034480302OZK	480/70 R34	TL	479	1580	143/146	D/A8	2725/2980	23	4739	718
	UR7038480302OZK	480/70 R38	TL	480	1685	145/148	D/A8	2900/3170	23	5067	771
	*UR7030520302OZK	520/70 R30	TL	516	1536	145/142	A8/B	2900/2720	23	4823	698
	UR7034520302OZK	520/70 R34	TL	516	1640	148/151	D/A8	3150/3440	23	4908	742
	UR7038520302OZK	520/70 R38	TL	516	1749	150	D	3350	23	5223	793
	UR7038580302OZK	580/70 R38	TL	577	1827	155	D	3875	23	5441	823
	UR7042580302OZK	580/70 R42	TL	587	1879	158/158	A8/B	4250/4250	23	5900	812
	UR7028600302OZK	600/70 R28	TL	591	1551	157/160	D/A8	4125/4500	35	4684	698
	*UR7030600302OZK	600/70 R30	TL	601	1602	161/158	D/A8	4620/4250	35	5030	725
	*UR7034600302OZK	600/70 R34	TL	601	1704	160/160	A8/B	4500/4500	35	5351	776
	UR7046620302OZK	620/70 R46	TL	625	2036	162/165	D/A8	4750/5200	23	6124	931
	UR7038710302OZK	710/70 R38	TL	716	1959	171/174	D/A8	6150/6730	35	5842	880
	UR7042710302OZK	710/70 R42	TL	716	2061	173/176	D/A8	6500/7120	35	6162	931

THE ART OF HIGH TRACTION

Experience the high traction with special design of Özka Tyres.



AGRIGOR20 NTR

THE ART OF ENGINEERING

Bringing the power of nature and technology together, AGRIGOR20 NTR sets a new standard in agricultural tyres. Enhanced with lavender oil, AGRIGOR20 NTR does not only deliver exceptional performance but also stands out with its unique lavender scent.



AGROLOX-S

THE ART OF SUSTAINABILITY

AGROLOX-S stands out as an innovative solution offering sustainability and high performance to the agricultural tyre sector. Made with 55% recyclable materials, AGROLOX-S adapts to tough conditions while providing farmers with long-lasting durability.





KNK30

FRONT TRACTOR TYRES

- Tractor front tyre for general use
- Resistance to stone and impacts thanks to strong and robust body
- Smooth driving with gutters at central back
- Prevention of skidding thanks to treads in shoulders
- Long lasting and economic use
- Excellent performance in highway and land



KNK33

FRONT TRACTOR TYRES

- Extra strong with its increased tread depth
- Comfortable driving in the field and on the road by pattern design
- Mud-free pattern

KNK30	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U3162011OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	U3162021OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	U3163011OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	U3163021OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	U3164011OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164021OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363

KNK33	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U3162111OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	U3162121OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	U3163111OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	U3163121OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	U3164211OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164221OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	U3191011OZK	6.00-19 6PR	TT	165	814	93	A6	650	48	2453	374



KNK32

FRONT TRACTOR TYRES

- Long lasting front tractor tyre
- High maneuverability thanks to nondirectional use feature
- Resistant structure against punctures thanks to increased tread depth



KNK35

FRONT TRACTOR TYRES

- Suitable to asphalt and land usage
- Excellent maneuverability and nondirectional use
- Resistant structure against punctures
- Straight movement stability in soft land

KNK32	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U3164111OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164121OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	U3181021OZK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
	U3201021OZK	6.50-20 8PR	TT	175	865	102	A6	850	54	2605	397
	U3202021OZK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417

KNK35	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U3161011OZK	5.50-16 6PR	TT	150	710	86	A6	530	54	2135	325
	U3161021OZK	5.50-16 8PR	TT	150	710	91	A6	615	54	2135	325
	U3162211OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
	U3162221OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
	U3163211OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
	U3163221OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
	U3164311OZK	7.50-16 6PR	TT	205	805	98	A6	750	41	2404	363
	U3164321OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
	U3166021OZK	9.00-16 8PR	TT	234	855	111	A6	1090	45	2545	383
	U3167021OZK	10.00-16 8PR	TT	274	895	115	A6	1215	41	2658	399
	U3168021OZK	11.00-16 8PR	TT	315	965	118	A6	1320	36	2856	427
	U3181221OZK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390



KNK50

FRONT TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



KNK50

REAR TRACTOR TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U3151021OZK	7.50-15 8PR	TT	205	780	99	A6	775	52	2325	350
U3162311OZK	6.00-16 6PR	TT	165	735	88	A6	560	48	2206	335
U3162321OZK	6.00-16 8PR	TT	165	735	93	A6	650	48	2206	335
U3163311OZK	6.50-16 6PR	TT	175	760	91	A6	615	45	2277	345
U3163321OZK	6.50-16 8PR	TT	175	760	97	A6	730	54	2277	345
U3164421OZK	7.50-16 8PR	TT	205	805	103	A6	875	54	2404	363
U3181421OZK	7.50-18 8PR	TT	205	860	106	A6	950	54	2575	390
U3202121OZK	7.50-20 8PR	TT	205	915	108	A6	1000	49	2747	417
U3203011OZK	9.5-20 6PR	TT	241	940	101	A6	825	30	2817	427
U3203021OZK	9.5-20 8PR	TT	241	940	106	A6	950	35	2817	427
U3203022OZK	9.5-20 8PR	TL	241	940	106	A6	950	35	2817	427
U3204021OZK	11.2-20 8PR	TT	285	1005	113	A6	1150	38	3001	453
U3204022OZK	11.2-20 8PR	TL	285	1005	113	A6	1150	38	3001	453



KNK50

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U5241011OZK	8.3-24 6PR	TT	210	1009	105	A6	925	30	3044	465
U5241021OZK	8.3-24 8PR	TT	210	1009	108	A6	1000	35	3044	465
U5242011OZK	9.50-24 6PR	TT	241	1050	110	A6	1060	26	3160	481
U5242021OZK	9.50-24 8PR	TT	241	1050	116	A6	1250	34	3160	481
U5243011OZK	11.2-24 6PR	TT	284	1105	110	A6	1060	26	3316	503
U5243021OZK	11.2-24 8PR	TT	284	1105	116	A6	1250	34	3316	503
U5243041OZK	11.2-24 12PR	TT	284	1105	122	A6	1500	40	3316	503
U5244011OZK	12.4-24 6PR	TT	315	1160	115	A6	1215	24	3471	525
U5244021OZK	12.4-24 8PR	TT	315	1160	118	A6	1320	29	3471	525
U5244121OZK	320/85-24 8PR	TT	315	1160	118	A6	1320	29	3471	525
U5244041OZK	12.4-24 12PR	TT	315	1160	124	A6	1600	35	3471	525
U5244141OZK	320/85-24 12PR	TT	315	1160	124	A6	1600	35	3471	525
U5245011OZK	13.6-24 6PR	TT	345	1210	120	A6	1400	22	3613	545
U5245021OZK	13.6-24 8PR	TT	345	1210	123	A6	1550	28	3613	545
U5245041OZK	13.6-24 12PR	TT	345	1210	129	A6	1850	34	3613	545
U5246011OZK	14.9-24 6PR	TT	378	1265	125	A6	1650	20	3768	567
U5246021OZK	14.9-24 8PR	TT	378	1265	128	A6	1800	26	3768	567
U5246121OZK	380/85-24 8PR	TT	378	1265	128	A6	1800	26	3768	567
U5246031OZK	14.9-24 10PR	TT	378	1265	131	A6	1950	30	3768	567
U5246131OZK	380/85-24 10PR	TT	378	1265	131	A6	1950	30	3768	567
U5246051OZK	14.9-24 14PR	TT	378	1265	137	A6	2300	38	3768	567
U5248021OZK	16.9-24 8PR	TT	429	1335	133	A6	2060	25	3966	595
U5248031OZK	16.9-24 10PR	TT	429	1335	136	A6	2240	29	3966	595
U5248051OZK	16.9-24 14PR	TT	429	1335	141	A6	2575	35	3966	595
U5247042OZK	15.5/80-24 12PR	TL	394	1260	157	A6	4125	44	3754	565
U5247062OZK	15.5/80-24 16PR	TL	394	1260	163	A6	4875	58	3754	565
U5261031OZK	14.9-26 10PR	TT	378	1315	133	A6	2060	30	3926	592
U5262031OZK	18.4-26 10PR	TT	467	1461	142	A6	2650	26	4338	650
U5262061OZK	18.4-26 16PR	TT	467	1461	153	A6	3650	44	4338	650
U5261051OZK	14.9-26 14PR	TT	378	1315	140	A6	2500	39	3926	592
U5281011OZK	11.2-28 6PR	TT	284	1205	112	A6	1120	26	3630	553
U5281021OZK	11.2-28 8PR	TT	284	1205	118	A6	1320	34	3630	553
U5282011OZK	12.4-28 6PR	TT	315	1260	117	A6	1285	25	3786	575
U5282021OZK	12.4-28 8PR	TT	315	1260	125	A6	1650	30	3786	575
U5282221OZK	320/85-28 8PR	TT	315	1260	125	A6	1650	30	3786	575
U5283011OZK	13.6-28 6PR	TT	345	1310	121	A6	1450	23	3927	595
U5283021OZK	13.6-28 8PR	TT	345	1310	125	A6	1650	29	3927	595

KNK50

REAR TRACTOR TYRES

KNK50

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U5284011OZK	14.9-28 6PR	TT	378	1365	125	A6	1650	20	4083	617
U5284021OZK	14.9-28 8PR	TT	378	1365	130	A6	1900	26	4083	617
U5284051OZK	14.9-28 14PR	TT	378	1365	143	A6	2725	40	4083	617
U5285021OZK	16.9-28 8PR	TT	429	1435	135	A6	2180	24	4281	645
U5285031OZK	16.9-28 10PR	TT	429	1435	139	A6	2430	29	4281	645
U5285051OZK	16.9-28 14PR	TT	429	1435	143	A6	2725	34	4281	645
U5301021OZK	14.9-30 8PR	TT	378	1415	132	A6	2000	26	4240	642
U5301031OZK	14.9-30 10PR	TT	378	1415	136	A6	2240	29	4240	642
U5302021OZK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
U5302031OZK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
U5302051OZK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
U5302151OZK	420/85-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
U5303021OZK	18.4-30 8PR	TT	467	1550	139	A6	2430	20	4622	696
U5303121OZK	460/85-30 8PR	TT	467	1550	139	A6	2430	20	4622	696
U5303031OZK	18.4-30 10PR	TT	467	1550	145	A6	2900	26	4622	696
U5303131OZK	460/85-30 10PR	TT	467	1550	145	A6	2900	26	4622	696
U5303051OZK	18.4-30 14PR	TT	467	1550	154	A6	3750	40	4622	696
U5303151OZK	460/85-30 14PR	TT	467	1550	154	A6	3750	40	4622	696
U5321021OZK	8.3-32 8PR	TT	211	1195	111	A6	1090	46	3634	559
U5322021OZK	9.5-32 8PR	TT	241	1250	115	A6	1215	39	3790	581
U5323021OZK	12.4-32 8PR	TT	315	1360	125	A6	1650	32	4101	625
U5341031OZK	16.9-34 10PR	TT	429	1585	142	A6	2650	29	4753	720
U5341131OZK	420/85-34 10PR	TT	429	1585	142	A6	2650	29	4753	720
U5341051OZK	16.9-34 14PR	TT	429	1585	148	A6	3150	37	4753	720
U5341151OZK	420/85-34 14PR	TT	429	1585	148	A6	3150	37	4753	720
U5342031OZK	18.4-34 10PR	TT	467	1650	146	A6	3000	26	4937	746
U5342131OZK	460/85-34 10PR	TT	467	1650	146	A6	3000	26	4937	746
U5342051OZK	18.4-34 14PR	TT	467	1650	153	A6	3650	36	4937	746
U5361011OZK	12.4-36 6PR	TT	315	1465	121	A6	1450	24	4429	677
U5361021OZK	12.4-36 8PR	TT	315	1465	126	A6	1700	29	4429	677
U5362011OZK	13.6-36 6PR	TT	345	1515	125	A6	1650	23	4571	697
U5362021OZK	13.6-36 8PR	TT	345	1515	129	A6	1850	29	4571	697
U5381021OZK	12.4-38 8PR	TT	315	1515	127	A6	1750	29	4587	703
U5382011OZK	13.6-38 6PR	TT	345	1565	126	A6	1700	23	4728	723
U5382021OZK	13.6-38 8PR	TT	345	1565	131	A6	1950	29	4728	723
U5382031OZK	13.6-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
U5383021OZK	14.00-38 8PR	TT	345	1565	131	A6	1950	29	4728	723
U5383031OZK	14.00-38 10PR	TT	345	1565	135	A6	2180	33	4728	723
U5384031OZK	15.5-38 10PR	TT	394	1570	138	A6	2360	33	4742	725
U5384041OZK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
U5385031OZK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771
U5385051OZK	16.9-38 14PR	TT	429	1685	152	A6	3550	40	5067	771
U5386031OZK	18.4-38 10PR	TT	467	1750	147	A6	3075	26	5251	797
U5386051OZK	18.4-38 14PR	TT	467	1750	154	A6	3750	36	5251	797
U5262051OZK	18.4-26 14PR	TT	467	1461	150	A6	3350	40	4338	650



KNK53

REAR TRACTOR TYRES

AGRICULTURAL TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK53

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U5302221OZK	16.9-30 8PR	TT	429	1485	137	A6	2300	25	4438	670
U5302231OZK	16.9-30 10PR	TT	429	1485	144	A6	2800	28	4438	670
U5302241OZK	16.9-30 12PR	TT	429	1485	147	A6	3075	31	4438	670
U5302251OZK	16.9-30 14PR	TT	429	1485	150	A6	3350	34	4438	670
U5384141OZK	15.5-38 12PR	TT	394	1570	141	A6	2575	38	4742	725
U5385131OZK	16.9-38 10PR	TT	429	1685	145	A6	2900	30	5067	771





KNK55

IRRIGATION TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks



KNK48

HARVESTER TYRES

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK55

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm						
U524311OZK	11.2-24 6PR (IRRIGATION)	TT	284	1105	110	A6	1060	26	3316	503
U524312OZK	11.2-24 8PR (IRRIGATION)	TT	284	1105	116	A6	1250	34	3316	503
U524621OZK	14.9-24 6PR (IRRIGATION)	TL	378	1265	123	A6	1550	20	3768	567
U524621OZK	14.9-24 6PR (IRRIGATION)	TT	378	1265	123	A6	1550	20	3768	567
U524622OZK	14.9-24 8PR (IRRIGATION)	TT	378	1265	127	A6	1750	26	3768	567
U538091OZK	11.2-38 6PR (IRRIGATION)	TT	284	1450	117	A6	1285	19	4403	677
U538092OZK	11.2-38 8PR (IRRIGATION)	TT	284	1450	122	A6	1500	26	4403	677

KNK48

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm						
U418104OZK	10.5/80-18 12PR	TT	274	885	135/123	A8	2180	65	2646	400
U418205OZK	12.5/80-18 14PR	TT	308	965	144/131	A8	2800	62	2872	432
U418306OZK	13.0/65-18 16PR	TT	336	890	144/131	A8	2800	71	2660	402



KNK36

HARVESTER TYRES

- Easy rolling resistance with five-rib design
- Suitable for both on and off road application
- Designed for field / road transport and soil tillage operations with implement machinery and trailers
- Good flotation properties with a high load capacity at low tyre pressure



KNK50

HARVESTER TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK36

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm						
U420305OZK	16.0/70-20 14PR	TL	418	1075	154	A6	3750	51	3099	438
U424203OZK	9.00-24 10PR	TL	272	1094	124	B	1600	41	3285	499

KNK50

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm						
U526307OZK	23.1-26 18PR	TL	587	1605	162	A6	4750	37	4746	708
U530326OZK	18.4-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
U530336OZK	460/85-30 16PR	TT	467	1550	158	A6	4250	45	4622	696
U530407OZK	23.1-30 18PR	TL	587	1715	160	A6	4500	36	5088	762
U534206OZK	18.4-34 16PR	TT	467	1650	159	A6	4375	45	4937	746
U538706OZK	20.8-38 16PR	TT	528	1840	162	A6	4750	39	5506	833
U538706OZK	20.8-38 16PR	TL	528	1840	162	A6	4750	39	5506	833



KNK22

FLOTATION TYRES

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



KNK26

FLOTATION TYRES

- Resistant to stone and impacts thanks to its improved base
- General purposed trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction

KNK22	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4202051OZK	9.00-20 14PR	TT	247	1017	133	A6	2060	81	3035	458	

KNK26	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4162041OZK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387	
U4162051OZK	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387	



KNK25

FLOTATION TYRES

- Resistance to stone and impacts thanks to its improved base
- General purpose trailer tyre
- Long lasting and economic use
- Excellent performance in highway and land
- Mud-repellent feature thanks to its special pattern, enhanced traction



KNK27

FLOTATION TYRES

- Balanced driving and excellent traction thanks to its special design
- Increased water and mud discharge thanks to surrounded gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature

KNK25	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4161041OZK	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355	
U4201051OZK	8.25-20 14PR	TT	234	970	133	A6	2060	90	2902	439	

KNK27	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4162141OZK	9.00-16 12PR	TT	247	865	125	A6	1650	58	2573	387	
U4162151OZK	9.00-16 14PR	TT	247	865	128	A6	1800	67	2573	387	



KNK28

FLOTATION TYRES

- Convenient to use in asphalt and land thanks to back pattern
- Durable sidewall with strong structure
- Soil holding feature with complex tread structure and channels
- Providing straight location to the ground thanks to back design



KNK46

FLOTATION TYRES

- Soil tillage, transport and hay harvesting applications with implement machinery, trailers and hay harvesters/balers
- The special tread compound resulting in exceptional cut and strong tread along with excellent wear resistance on all types of terrains

KNK28	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4161141OZK	7.50-16 12PR	TT	214	787	121	A8	1450	72	2353	355	

KNK46	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4173052OZK	500/50-17 14PR	TL	503	932	149	A8	3250	41	2771	416	
U4173072OZK	500/50-17 18PR	TL	503	932	157	A8	4125	70	2771	416	



KNK42

FLOTATION TYRES

- High load bearing capacity with strong structure and less soil compression with its wide base
- Anti-ground tread design



KNK48

FLOTATION TYRES

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK42	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4153442OZK	260/70-15.3 (10.0/75-15.3) 12PR	TL	268	753	126/114	A8	1700	52	2251	340	
U4153552OZK	300/80-15.3 (11.5/80-15.3) 14PR	TL	295	869	141/129	A8	2575	58	2579	386	
U4153052OZK	12.5/80-15.3 14PR	TL	307	889	142	A8	2650	62	2636	394	

KNK48	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
U4151042OZK	10.0/75-15.3 (260/70-15.3) 12PR	TL	264	760	126/114	A8	1700	68	2271	343	
U4151052OZK	10.0/75-15.3 (260/70-15.3) 14PR	TL	264	760	130/118	A8	1900	80	2271	343	
U4152052OZK	11.5/80-15.3 (300/80-15.3) 14PR	TL	290	845	139/126	A8	2430	69	2511	377	
U4153152OZK	12.5/80-15.3 (320/80-15.3) 14PR	TL	307	889	142/129	A8	2650	62	2636	394	
U4163041OZK	10.5/65-16 (265/65-16) 12PR	TT	274	755	126/114	A8	1700	65	2262	343	



KNK52

FLOTATION TYRES

- High load bearing capacity with low section off road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern



KNK41

IMPLEMENT TYRES

- Resistant to impacts and cuts thanks to the use of high quality compound
- Less soil compaction with large footprint
- Thanks to its special design, less tyre rolling resistance and fuel consumption

KNK52

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U4151142OZK	10.0/75-15.3 12PR	TL	264	760	126/114	A8	1700	68	2271	343
U4152152OZK	11.5/80-15.3 14PR	TL	290	845	139/126	A8	2430	69	2511	377
U4153252OZK	12.5/80-15.3 14PR	TL	307	889	142/129	A8	2650	62	2636	394

KNK41

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U4154122OZK	9.5L-15 SL 8PR	TL	240	770	112	B	1120	44	2418	350
U4154222OZK	11L-15 SL 8PR	TL	280	775	113	B	1150	36	2434	352
U4154342OZK	12.5L-15 SL 12PR	TL	315	825	127	B	1750	52	2591	372



KNK56

FLOTATION TYRES

- Extra strong against stretching thanks to strong frame structure
- Flexibility and deep tread profile



KNK42

IMPLEMENT TYRES

- Low rolling resistance
- High comfort
- Preventing skidding thanks to its special pattern
- Low soil compact feature thanks to its wide base

KNK56

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U4153362OZK	12.5/80-15.3 16PR	TL	307	889	144/131	A8	2800	71	2636	394
U4153672OZK	400/60-15.5 18PR	TL	404	874	151/139	A8	3450	90	2595	389
U4221062OZK	550/60-22.5 16PR	TL	543	1244	167/163	A8/B	3750	41	3697	555

KNK42

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U1124032OZK	10.0/80-12 10PR	TL	261	671	116	A8	1250	57	1993	299



KNK48

IMPLEMENT TYRES

- Highway, agricultural and off road tyre with high load bearing capacity and low section
- Minimum ground holding feature thanks to wide circumference channels
- Moving forward easily without submerging thanks to its wide tread pattern
- Resistant structure against punctures thanks to increased tread depth

KNK48

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U1124132OZK	10.0/80-12 10PR	TL	264	710	116	A8	1250	57	2103	314



KNK52

IMPLEMENT TYRES

- High load bearing capacity with low section off road and agricultural tyre
- Holding features for dry and wet grounds thanks to its pattern

KNK52

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U1121001OZK	5.00-12 4PR	TT	145	580	62	A6	265	32	1736	262
U1123011OZK	7.00-12 6PR	TT	200	683	83	A6	485	36	2027	304
U1131011OZK	6.50/80-13 6PR	TT	170	640	82	A6	475	52	1913	289



KNK50

IMPLEMENT TYRES

- High traction
- Easy movement ability with anti-ground feature
- Preventing clusters in the center and sidewalls during movement
- Facilitating releasing of muds thanks to windowed blocks

KNK50

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U1152011OZK	6.50/80-15 6PR	TT	163	663	96	A6	710	52	1994	303



KNK54

IMPLEMENT TYRES

- High traction ability thanks to its angle blocks
- Easy movement ability thanks to anti-ground base design
- Preventing clusters in the center and sidewalls during movement of tractor thanks to its open design in center
- Facilitating releasing of muds thanks to windowed blocks

KNK54

Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U1122011OZK	6.50/80-12 6PR	TT	163	588	80	A6	450	52	1758	266



KNK140

IMPLEMENT TYRES

- Proper use in lands and gardens
- Strong and robust structure
- Preventing skidding thanks to its special pattern
- Long lasting and economic use
- Optimum performance with small-type gardening and agriculture vehicles

KNK140	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U1151011OZK	5.00-15 6PR	TT	145	655	76	A6	400	50	1972	300



FRS40

FORESTRY TYRES

- Specially designed for forestry application
- Special tread and sidewall compound provides maximum tyre life against cut and crack resistance
- Excellent puncture resistance thanks to strong breaker construction shoulder to shoulder
- Lower lug angle providing excellent grip and self cleaning properties for logging operations
- Tie-bar on the central lugs protects the tyre against deep impacts

FRS40	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U5262262OZK	18.4-26 16PR	TL	467	1461	153	A6	3650	44	4338	650



THE ART OF SATISFYING CUSTOMERS

Move forward your work with Özka's on-time delivery and fast solutions.

INDUSTRIAL, EM, OTR TYRES

ORMER X30	STEXOR40	OR71	KNK44
KNK65	KNK66	IND80	KNK12
IND85	IND88	KNK70	KNK72
KNK74	KNK77	KNK88	KNK40
SOLIFT			





NEW PATTERN



ORMER X30

ALL STEEL RADIAL TYRES

- Suitable for working on all kinds of floors and areas
- High load capacity
- Resistance tread structure to cuts and heat

NEW PATTERN



STEXOR40

RADIAL EM TYRES

STEEL BELTED

- High traction thanks to its special tread design
- Exceptional wear resistance
- High load capacity thanks to its steel belts
- Balanced and comfortable ride
- Superior durability

ORMER X30	Tyre Info						Rim	Technical Information						Inflated Unloaded Dimension		
	Product Code	Tyre Size	Star Rating	TT/TL	LI/SI	TRA Code		Rec. Rim (inch)	Speed (km/h)	Inflation Pressure (Bar / psi)	Load Capacity (kg)					Overall Diameter (mm)
							3.5 Bar / 51 Psi				4.0 Bar / 58 Psi	4.5 Bar / 65 Psi	5.0 Bar / 73 Psi	5.75 Bar / 83 Psi		
*URC0252057020ZK	20.5 R25	**	TL	193 A2 / 177 B	L3 / E3	17.00/2.0	10 km / h	8450	9200	9950	10700	11500	1492	520		
							50 km / h	6000	6700	7300	-	-				
*URC0252357020ZK	23.5 R25	**	TL	201 A2 / 185 B	L3 / E3	19.50/2.5	10 km / h	10650	11750	12750	13600	14500	1617	597		
							50 km / h	7500	8500	9250	-	-				
*URC0252657020ZK	26.5 R25	**	TL	209 A2 / 193 B	L3 / E3	22.00/3.0	10 km / h	13600	15000	16150	17350	18500	1750	673		
							50 km / h	9500	10500	11500	-	-				



*The marked product will be launched during 2025.

STEXOR40	Tyre Info					Rim	Inflated Unloaded Dimension		Loaded Static Radius (mm)	Rolling Circumference (mm)	Inflation Pressure (psi)	Load Capacity (kg) *				
	Product Code	Tyre Size	TT/TL	LI/SI	TRA Code		Rec. Rim (inch)	Overall Diameter (mm)				Section Width (mm)	10 km/h	25 km/h	30 km/h	40 km/h **
						*UR70204006020ZK			400/70 R20	TL	149 A8/B		R-4	13	1068	404
*UR70204056020ZK	405/70 R20	TL	149 A8/B	R-4	13	1070	414	480	3200	58	4065	3610	3480	3250	3250	
*UR70244606020ZK	460/70 R24 (17.5LR24)	TL	159 A8/B	R-4	DW15L	1251	453	562	3740	58	5470	4855	4680	4375	4375	



*The marked product will be launched during 2025.
* Please contact the manufacturer for load carrying capacity at different speeds ** Carrying capacity at standard speed and standard load



OR71

RADIAL EM TYRES

- High traction and comfort
- Longer service life
- Comfortable drive due to flexible sidewall structure
- Strong carcass structure
- Resistance to fatigue due to wide shoulder and blocks
- Strong tread compound for cut-resistance
- High performance due to wide base track
- Mud repellent feature due to specially designed tread pattern



KNK65

EM / INDUSTRIAL TYRES

- Long wear-life
- Cracking/fatigue resistance at treads
- Maximum traction
- Increased sidewall protection

70 SERIES	Product Code	Tyre Size	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius	KNK65
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load			
				mm	mm								
UR7024460712OZK	460/70 R24	TL	455	1255	159/159	A8/B	R-4	4375/4375	58	3740	563		
UR7024500712OZK	500/70 R24	TL	503	1310	164/164	A8/B	R-4	5000	58	4113	592		

KNK65	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm						
U6161042OZK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352	
U6162052OZK	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380	

80 SERIES	Product Code	Tyre Size	TT/TL	Section Width	Overall Diameter	Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
									kg	psi		
UR8024440712OZK	440/80 R24	TL	450	1320	154/154	A8/B	R-4	3750/3750	46	3924	589	
UR8028440712OZK	440/80 R28	TL	450	1420	156/156	A8/B	R-4	4000/4000	46	4238	639	



KNK44

EM / INDUSTRIAL TYRES

- Resistance to stone cuts, cracks and breaks
- Long wear-life



KNK66

EM / INDUSTRIAL TYRES

- High traction and comfort
- Designed compatible with scrap operations and recycling process
- Excellent maneuverability at high tonnage due to reinforced shoulder blocks
- Comfortable drive due to flexible sidewall structure
- Reinforced back structure
- Longer life due to improved back structure
- Wear resistance due to special back combination

KNK44	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius	KNK66
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load			
				mm	mm							
U6202061OZK	10.00-20 16PR	TT	283	1084	146 / 143	B	3000	109	3225	484		
U6202062OZK	10.00-20 16PR	TL	283	1084	146 / 143	B	3000	109	3225	484		

KNK66	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm						
U6161142OZK	10-16.5 12PR	TL	282	775	138	A3	2360	84	2323	352	
U6162152OZK	12-16.5 14PR	TL	320	846	148	A3	3150	90	2524	380	
U6182052OZK	12.5/80-18 14PR	TL	305	983	146	A8	3000	62	2923	439	



IND80

EM / INDUSTRIAL TYRES

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life



KNK12

EM / INDUSTRIAL TYRES

- Pattern feature designed for non-road and highway use
- Excellent maneuverability due to nondirectional use feature

IND80

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm				kg	psi		
U6161242OZK	10-16.5 12PR	TL	256	793	138	A3	R-4	2360	84	2374	359
U6162252OZK	12-16.5 14PR	TL	297	858	148	A3	R-4	3150	90	2558	385
U6181042OZK	10.5/80-18 12PR	TL	271	892	135	A8	R-4	2180	62	2666	403
U6182152OZK	12.5/80-18 14PR	TL	285	955	146	A8	R-4	3000	62	2844	428
U6207062OZK	16.0/70-20 16PR	TL	385	1091	166	A2	R-4	5300	65	3244	487
U6207162OZK	405/70-20 16PR	TL	385	1091	166	A2	R-4	5300	65	3244	487
U6243062OZK	15.5/80-24 16PR	TL	412	1269	162	A8	R-4	4750	72	3780	569
U6245062OZK	16.0/70-24 16PR	TL	418	1200	169	A2	R-4	5800	65	3584	541
U6245162OZK	405/70-24 16PR	TL	418	1200	169	A2	R-4	5800	65	3584	541
U6246062OZK	16.9-24 16PR	TL	429	1310	154	A8	R-4	3750	46	3895	585
U6246162OZK	440/80-24 16PR	TL	429	1310	154	A8	R-4	3750	46	3895	585
U6247052OZK	17.5L-24 14PR	TL	475	1277	154	A8	R-4	3750	46	3802	572
U6248052OZK	19.5L-24 14PR	TL	495	1314	154	A8	R-4	3750	38	3907	587
U6251052OZK	15.5-25 14PR	TL	400	1286	173	A2	R-4	6500	68	3836	578
U6261052OZK	18.4-26 14PR	TL	467	1425	160	A8	R-4	4500	42	4237	636
U6281052OZK	16.9-28 14PR	TL	429	1410	156	A8	R-4	4000	43	4210	635
U6281152OZK	440/80-28 14PR	TL	429	1410	156	A8	R-4	4000	43	4210	635
U6301062OZK	16.9-30 16PR	TL	418	1466	156	A8	R-4	4000	47	4384	663

KNK12

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm			kg	psi		
U6204152OZK	12.5-20 14PR	TL	325	1040	137	A8	2300	51	3100	467

INDUSTRIAL, EM, OTR TYRES



IND85

EM / INDUSTRIAL TYRES

- High traction and comfort
- Resistance to any kind of impacts with its back structure
- Comfortable drive due to flexible sidewall structure
- Reinforced bead design
- Reinforced sidewall structure
- Excellent maneuverability at high tonnage due to flexible sidewall structure
- Longer life with its reinforced tread pattern
- Strong tread compound against punctures and impacts
- Longer life due to increased tread number and improved tread depth

Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
			Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
			mm	mm				kg	psi		
U6182252OZK	12.5/80-18 14PR	TL	304	965	146	A8	R-4	3000	62	2872	432



IND88

EM / INDUSTRIAL TYRES

- Robust industrial pattern with higher resistance to puncture and tread wear
- Higher traction with wide pattern design at the center lug
- Reinforced bead design



KNK72

EM / INDUSTRIAL TYRES

- High traction and excellent self-cleaning feature in any conditions thanks to deep and corrugated tread structure
- Resistance to stone cuts, cracks and breaks
- Higher wear and root resistance thanks to using bar in the center
- Resistance to any kind of impacts
- Long wear-life

IND88	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm							
U6182352OZK	12.5/80-18 14PR	TL	308	987	146	A8	R-4	3000	62	2934	441	
U6183052OZK	340/80-18 14PR	TL	343	1001	146	A8	R-4	3000	62	2974	446	
U6207262OZK	16.0/70-20 16PR	TL	385	1091	166	A2	R-4	5300	65	3244	487	
U6206052OZK	14.5-20 14PR	TL	355	1095	143	D	R-4	2725	51	3256	489	

KNK72	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm							
U6241062OZK	13.00-24 16PR	TL	335	1280	151	A8	G2	3450	58	3811	573	
U6242062OZK	14.00-24 16PR	TL	382	1354	153	A8	G2	3650	54	4020	603	



KNK70

EM / INDUSTRIAL TYRES

- Strong and durable thanks to excellent design
- Its compound resistant to wear, and its blocks resistant to heavy conditions with long maintenance periods
- Minimizing stretching at base with its strong blocks in its center



KNK74

EM / INDUSTRIAL TYRES

- Strong structure
- Increased tread depth and tread pattern providing optimum traction in muddy fields

KNK70	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm							
U6242002OZK	14.00-24 24PR	TL	375	1360	186	A2	E-3 L-3	9500	123	4037	605	
U6242042OZK	14.00-24 32PR	TL	375	1360	190	A2	E-3 L-3	10600	145	4037	605	
U6251062OZK	15.5-25 16PR	TL	384	1261	175	A2	E-3 L-3	6900	72	3765	568	
U6252082OZK	17.5-25 20PR	TL	455	1371	181	A2	E-3 L-3	8250	83	4076	612	
U6254002OZK	20.5-25 24PR	TL	531	1527	189	A2	E-3 L-3	10300	76	4517	674	
U6255002OZK	23.5-25 24PR	TL	604	1625	196	A2	E-3 L-3	12500	68	4794	714	
U6256022OZK	26.5-25 28PR	TL	702	1785	203	A2	E-4 L-4	15500	68	5246	778	
U6256042OZK	26.5-25 32PR	TL	702	1785	206	A2	E-4 L-4	17000	79	5246	778	
U6257042OZK	29.5-25 32PR	TL	758	1923	210	A2	E-4 L-4	19000	72	5637	833	

KNK74	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	TRA Code	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter				Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm							
U6244062OZK	16.00-24 16PR	TL	432	1493	160	A8	G2	4500	47	4413	658	



KNK77

COMPACTOR TYRES

- Wide shoulder and base width, blocked design
- High traction ability
- Anti-wear future thanks to its pattern appropriate for agricultural, industrial and off road use
- Consisting durable blocks
- Easy use in soft grounds
- Balanced driving and easy control thanks to wide shoulder and blocks



KNK40

FORKLIFT TYRES

- High kilometer performance thanks to its special structure
- Comfortable driving thanks to excellent traction
- Maximum traction
- Long wear-life
- Resistance to any kind of impacts

KNK77	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U6262052OZK	23.1-26 14PR	TL	587	1580	166	A8	5300	33	4675	698

KNK40	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U6091041OZK	6.00-9 12PR	TT	165	544	121	A5	1450	145	1610	240
	U6101041OZK	6.50-10 12PR	TT	181	592	125	A5	1650	110	1754	262
	U6121051OZK	7.00-12 14PR	TT	195	674	134	A5	2120	110	2001	300
	U6151051OZK	8.15-15 (28X9-15) 14PR	TT	220	710	146	A5	3000	145	2127	322
	U6152071OZK	8.25-15 18PR	TT	240	840	153	A5	3650	145	2495	374



KNK88

COMPACTOR TYRES

- Compressing ability for asphalt with its plane surfaced tread pattern
- Stable operation feature thanks to strong frame at sidewalls

KNK88	Product Code	Tyre Size & Ply Rating	TT/ TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Tyre Load Capacity	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U6201041OZK	9.00-20 12PR	TT	256	1002	157	A2	4125	94	2993	452
	U6203061OZK	11.00-20 16PR	TT	290	1040	168	A2	5600	107	3100	467



SOLIFT

SOLID FORKLIFT TYRES

NEW PATTERN

- High traction
- High resistance against punctures and tears
- Special mixture that protects the integral structure of the tyre
- Tread structure designed for hard working conditions
- Longer service-life
- Comfortable drive in operation

SOLIFT	Tyre Information				Technical Information					
	Product Code	Tyre Size	Recommended Rim	Bead Type	Overall Diameter	Section Width	Forklift (Up to 25km/h)		Load Index	Speed Index
							Load Wheel	Steer Wheel		
			mm	mm	kg	kg	LI	SI		
	U7081010OZK	18x7-8	4.33R-8	Quick Lip	452	160	2145	1650	125	A5
	U7101010OZK	200/50-10	6.50F-10	Quick Lip	457	193	2470	1900	130	A5
	U7102010OZK	23x9-10 (225/75-10)	6.50F-10	Quick Lip	583	198	3445	2650	142	A5
	U7151010OZK	8.15-15 (28x9-15)	7.0-15	Quick Lip	689	212	3445	2650	142	A5
	*U7103010OZK	6.50-10	5.00F - 10	Quick Lip	576	165	2340	1800	128	A5
	*U7091010OZK	6.00-9	4.00E - 9	Quick Lip	528	150	1885	1450	121	A5
	*U7121010OZK	7.00-12	5.00S - 12	Quick Lip	657	175	2920	2240	136	A5

THE ART OF CHALLENGING CONDITIONS

Struggle against hard conditions with Özka tyres, characterized by robust structure and exceptional impact resistance.



LCV TYRES

KNK20 KNK24

KNK25 KNK126







KNK20

LIGHT TRUCK & MINIBUS TYRES

- Strong frame structure and high wear resistance
- Balanced driving thanks to its corrugated pattern
- Increased water discharge thanks to its corrugated gutters
- Increased road bend ability and excellent traction
- Retreadability feature



KNK25

LIGHT TRUCK & MINIBUS TYRES

- Optimum performance in traction and brakes due to special deep back pattern
- Strong frame structure and high wear resistance
- Anti-stone increased water and mud resistance thanks to its surrounding gutters
- Retreadability feature

KNK20	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U2141021OZK	6.50-14 8PR	TT	171	647	97/95	L	730/690*	65	1918	287
	U2141031OZK	6.50-14 10PR	TT	171	647	100/98	L	800/750*	72	1918	287
	U2151031OZK	7.50-15 10PR	TT	235	789	114/112	L	1180/1120*	76	2318	344
	U2161031OZK	6.50-16 10PR	TT	176	748	108/107	L	1000/975*	73	2216	331
	U2162031OZK	7.00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345
	U2163041OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	335

KNK25	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U2163241OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355



KNK24

LIGHT TRUCK & MINIBUS TYRES

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature



KNK126

LIGHT TRUCK & MINIBUS TYRES

- Balanced driving and excellent traction thanks to its special corrugated pattern
- Increased water and mud resistance thanks to its surrounding gutters
- Strong frame structure and high wear resistance
- Comfortable driving
- Retreadability feature

KNK24	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U2163141OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355

KNK126	Product Code	Tyre Size & Ply Rating	TT/TL	Inflated Unloaded Dimension		Load Index	Speed Symbol	Load & Pressure		Dynamic Rolling Circumference	Static Loaded Radius
				Section Width	Overall Diameter			Load Capacity Per Axle	Tyre Pressure At Max. Load		
				mm	mm			kg	psi		
	U2161131OZK	6.50-16 10PR	TT	176	748	108/107	L	1000/975*	73	2216	331
	U2162131OZK	7.00-16 10PR	TT	198	785	113/112	L	1150/1120*	76	2317	345
	U2151131OZK	7.50-15 10PR	TT	235	786	114/112	L	1180/1120*	76	2310	342
	U2163341OZK	7.50-16 12PR	TT	210	810	121/120	L	1450/1400*	94	2386	355

THE ART OF UNDERSTANDING THE GROUND

Experience Özka tyre performance that avoids soil compaction and holding mud thanks to its deep and wide tread structure.

ÖZKA



RIM DIAMETER **EQUIVALENCE TABLE OF INTERCHANGEABILITY FOR RADIAL AND DIAGONAL TYRES**

16	6.00 # 16	210/80 # 16	240/70 # 16	260/65 # 16					
16	6.50 # 16	260/70 # 16	280/65 # 16						
16	7.50 # 16	210/95 # 16	250/80 # 16	280/70 # 16	300/65 # 16	320/65 # 16			
16	8.25 # 16	300/70 # 16							
18	7.50 # 18	210/95 # 18	250/80 # 18	280/70 # 18	300/65 # 18	320/65 # 18			
18	10.5/80 # 18	300/70 # 18	340/65 # 18						
20	7.50 # 20	280/70 # 20							
20	9.5 # 20	8.00 # 20	250/85 # 20	260/80 # 20	300/70 # 20	340/65 # 20			
20	11.2 # 20	280/85 # 20	320/70 # 20						
20	12.4 # 20	320/85 # 20	340/80 # 20	340/75 # 20	360/70 # 20	420/65 # 20			
20	13.6 # 20	14.9L # 20	380/75 # 20	400/70 # 20	380/70 # 20	440/65 # 20			
20	12.4 # 28	320/85 # 28	360/70 # 28	420/65 # 28					
24	9.5 # 24	240/85 # 24	250/85 # 24	300/70 # 24	360/60 # 24				
24	11.2 # 24	280/85 # 24	320/70 # 24						
24	12.4 # 24	320/85 # 24	360/70 # 24	420/65 # 24					
24	13.6 # 24	340/85 # 24	380/75 # 24	380/70 # 24	400/70 # 24	440/65 # 24			
24	14.9 # 24	380/85 # 24	420/70 # 24	460/70 # 24	480/65 # 24				
24	16.9 # 24	420/85 # 24	480/70 # 24	480/75 # 24	540/65 # 24				
26	16.9 # 26	480/70 # 26	540/65 # 26						
26	18.4 # 26	460/85 # 26	520/70 # 26	580/70 # 26	750/50 # 26				
26	23.1 # 26	28 L # 26	620/75 # 26	650/70 # 26	750/65 # 26				
28	9.5 # 28	240/85 # 28	250/85 # 28	340/65 # 28					
28	11.2 # 28	280/85 # 28	320/70 # 28						
28	13.6 # 28	340/85 # 28	380/70 # 28	440/65 # 28	480/60 # 28				
28	14.9 # 28	380/85 # 28	420/70 # 28	420/75 # 28	480/65 # 28	520/60 # 28			
28	16.9 # 28	420/85 # 28	480/70 # 28	480/75 # 28	540/65 # 28	600/60 # 28			
28	18.4 # 28	540/75 # 28	600/65 # 28						
30	14.9 # 30	380/85 # 30	420/70 # 30						
30	16.9 # 30	420/90 # 30	420/85 # 30	480/70 # 30	480/75 # 30	540/65 # 30	600/60 # 30		
30	18.4 # 30	21L # 30	460/85 # 30	520/70 # 30	600/65 # 30	710/55 # 30			
30	23.1 # 30	620/75 # 30	650/70 # 30	710/65 # 30					
32	8.3 # 32	210/95 # 32							
32	9.5 # 32	230/95 # 32	270/80 # 32	270/75 # 32					
32	12.4 # 32	320/85 # 32							
32	24.5 # 32	650/75 # 32	680/70 # 32	800/60 # 32					
32	30.5 L # 32	710/75 # 32	680/75 # 32	800/65 # 32	850/60 # 32	900/55 # 32	1050/50 # 32		
34	14.9 # 34	380/85 # 34							
34	16.9 # 34	420/85 # 34	480/70 # 34	480/75 # 34	500/70 # 34	540/65 # 34	600/60 # 34		
34	18.4 # 34	460/85 # 34	520/70 # 34	520/75 # 34	540/70 # 34	600/65 # 34	710/55 # 34	800/50 # 34	
34	20.8 # 34	23.1 # 34	620/75 # 34	710/70 # 34	650/65 # 34	710/60 # 34			
36	8.3 # 36	210/95 # 36							
36	12.4 # 36	320/85 # 36							
36	13.6 # 36	340/85 # 36							
36	9.5 # 36	230/95 # 36	270/80 # 36						
36	11.2 # 36	270/95 # 36							
38	9.5 # 38	230/95 # 38							
38	11.2 # 38	270/95 # 38	290/90 # 38						
38	12.4 # 38	320/85 # 38							
38	13.6 # 38	15.5 # 38	340/85 # 38	380/80 # 38	400/75 # 38				
38	14.9 # 38	380/85 # 38							
38	16.9 # 38	420/85 # 38	480/70 # 38	480/75 # 38	540/65 # 38	600/60 # 38			
38	18.4 # 38	460/85 # 38	520/70 # 38	520/75 # 38	600/65 # 38	650/60 # 38			
38	20.8 # 38	520/85 # 38	580/70 # 38	620/70 # 38	650/65 # 38	710/65 # 38	710/60 # 38	850/50 # 38	
42	9.5 # 42	230/95 # 42							
42	11.2 # 42	270/95 # 42	300/85 # 42						
42	12.4 # 42	300/95 # 42							
42	18.4 # 42	460/85 # 42	480/80 # 42	600/65 # 42					
42	20.8 # 42	520/85 # 42	580/70 # 42	620/70 # 42	650/65 # 42	750/60 # 42	710/60 # 42	850/55 # 42	900/50 # 42
44	8.3 # 44	210/95 # 44							
44	9.5 # 44	230/95 # 44							
46	12.4 # 46	270/95 # 46	300/95 # 46	320/90 # 46	340/85 # 46				
46	20.8 # 46	520/85 # 46	650/65 # 46	620/70 # 46					
48	9.5 # 48	230/95 # 48							
48	13.6 # 48	340/85 # 48							

Notes

*"#" Symbol can be replaced with "R" for Radial, "-" or "D" for Diagonal Tyres



HEADQUARTER/FACTORY

Mahmutpaşa Mah. Kanalyolu Cad. No:129 / 41140

Başiskele / Kocaeli, TÜRKİYE

Tel: +90 262 349 50 00

info@ozkalastik.com


SALES OFFICE/WAREHOUSE

Yaylacık Mah. Metin Sok. No:1

Başiskele / Kocaeli, TÜRKİYE

Tel: +90 262 349 50 00

info@ozkalastik.com



ozkalastik



ozkalastik



ozkalastik



ÖZKA Tyre

ozkatyres.com

